

11-29-00

A

11/28/00
JC675 U.S. PTO
09/23/01

THE ASSISTANT COMMISSIONER OF PATENTS
Washington, D.C. 20231

DOCKET NUMBER: RIC00043
November 28, 2000

JC675 U.S. PTO
09/23/01
11/28/00

Sir:

Transmitted herewith for filing is the Patent Application of:

Inventor: Dave McDysan et al.

For: EXTERNAL PROCESSOR FOR A DISTRIBUTED NETWORK ACCESS SYSTEM
Enclosed are:

- ☒ Patent Specification and Declaration
- ☒ 21 sheets of drawing(s).
- ☐ An assignment of the invention to WorldCom (includes Recordation Form Cover Sheet).
- ☐ A certified copy of a application.
- ☐ Information Disclosure Statement, PTO 1449 and copies of references.

The filing fee has been calculated as shown below:

For	Number Filed	Number Extra	Rate	Fee
Basic Fee				\$710
Total Claims	36 - 20	16	x 18 =	\$288
Indep. Claims	2 - 3		x 80 =	\$
MULTIPLE DEPENDENT CLAIM PRESENTED			x 260 =	\$
TOTAL				\$998.00

- ☒ Attached is a check in the amount of \$998.00. A duplicate copy of this sheet is enclosed.
- ☒ The Commissioner is hereby authorized to charge payment of the following fees associated with this communication or credit any overpayment to Deposit Account 06-0580. A duplicate copy of this sheet is enclosed.
- ☒ Any additional filing fees required under 37 CFR §1.16.
- ☒ Any patent application processing fees under 37 CFR

CERTIFICATE OF MAILING BY "EXPRESS MAIL" UNDER 37 CFR § 1.10

"Express Mail" mailing label number EL453462399US

Date of Mailing November 28, 2000

I hereby certify that the documents indicated below are being deposited with the United States Postal Service under 37 CFR 1.10 on the date indicated above and are addressed to Box Patent Applications, Assistant Commissioner of Patents, Washington, D.C. 20231 and mailed on the above Date of Mailing with the above "Express Mail" mailing label number

Cathy Berglund
(name of person mailing paper)

Catherine Berglund
SIGNATURE of person mailing paper or fee

Respectfully submitted,

Brian F. Russell

By
Brian F. Russell, Registration No. 40,796
FELSMAN, BRADLEY, VADEN, GUNTER & DILLON, LLP
Suite 350 Lakewood on the Park
7600B North Capital of Texas Highway
Austin, Texas 78731
Telephone (512) 343-6116

EXTERNAL PROCESSOR FOR A DISTRIBUTED NETWORK ACCESS SYSTEM

5

CROSS-REFERENCE TO RELATED APPLICATIONS

The present application is related to the following co-pending applications,
which are filed on even date herewith and incorporated herein by reference:

10

(1) U.S Patent Application Serial No. ___/_____(Docket No. RIC00033),
entitled "Network Access System Including a Programmable Access Device
Having Distributed Service Control;"

15

(2) U.S Patent Application Serial No. ___/_____(Docket No. RIC00042),
entitled "Programmable Access Device for a Distributed Network Access
System;" and

20

(3) U.S Patent Application Serial No. ___/_____(Docket No. RIC00044),
entitled "Message, Control and Reporting Interface for a Distributed Network
Access System."

BACKGROUND OF THE INVENTION

1. Technical Field:

25

The present invention relates in general to communication networks and,
in particular, to an IP-centric communication network. Still more particularly, the
present invention relates to an IP-based communication network including a
network access system having distributed and separated routing, signaling, service
control, filtering, policy control and other functionality from IP forwarding.

30

2. Description of the Related Art:

35

The Internet can generally be defined as a worldwide collection of
heterogeneous communication networks and associated gateways, bridges and
routers that all employ the TCP/IP (Transport Control Protocol/Internet Protocol)

suite of protocols to communicate data packets between a source and one or more destinations. As is well known to those skilled in the art, the TCP/IP suite of protocols corresponds to layers 3 and 4 (the network and transport layers, respectively) of the seven-layer International Organization for Standardization Open Systems Interconnection (ISO/OSI) reference model, which provides a convenient framework for discussing communication protocols. The ISO/OSI reference model further includes physical and link layers (layers 1 and 2, respectively) below the network and transport layers, and session, presentation, and application layers (layers 5 through 7, respectively) above the network and transport layers.

Figure 1A illustrates a metropolitan level view of an Internet Service Provider (ISP) network **10** through which customers can access the Internet. Starting from the left hand side, many customer Local Area Networks (LANs) **14** interface to ISP network **10** via a variety of metropolitan access networks **16**, which employ any of a number of network technologies; for example, Time Division Multiplexing (TDM), Asynchronous Transfer Mode (ATM), and Ethernet. Furthermore, as is typical in larger metropolitan areas, there are multiple levels of hierarchy in metropolitan access networks **16**, with multiple rings connecting each customer to an aggregation site and multiple lowest level aggregation sites feeding a higher-level aggregation site. Typically, there may be only a few aggregation sites where aggregation routers **12** are deployed in a metropolitan area. **Figure 1A** shows only one such aggregation site **17**. All traffic from a customer LAN **14** is backhauled via these aggregation networks to this aggregation site **17**, where aggregation routers **12** apply policy-driven treatment such as policing, marking, and admission control. Aggregation routers then route the traffic either back to another customer LAN **14**, or else to core router **18** for transmission across core **20** to some more distant destination.

The state of the art in router design to a large extent dictates the network design shown in **Figure 1A** because routers are expensive and must operate on highly aggregated traffic flows. A principal consideration in the design of such

networks is to minimize the number of routers so that the routing protocol will scale effectively. This means that a number of functions are concentrated in these routers: routing, policy database storage, and policy enforcement.

5 In the prior art, router architecture is generally monolithic and proprietary. Consequently, the range of data services that a service provider can offer in addition to basic packet routing is limited by the control software offered by router vendors. In addition, the packet-processing throughput of a router is generally limited by its originally installed processing hardware and cannot be expanded or extended without replacement of the entire router. The
10 monolithic and proprietary design of conventional routers presents a number of problems addressed by the present invention.

First, because routers traditionally have a single controller providing
15 all services for all message types, edge router controllers tend to be quite complex, making it difficult and expensive to add new services or modify existing services. As a result, the time to market for new router-based services is extended and is usually dependent upon vendors responding to service provider requests to implement new services within their proprietary router
20 architectures.

Second, conventional monolithic router architectures are not readily scalable, which presents a significant problem for service providers, particularly in light of the phenomenal growth of Internet traffic.
25 Consequently, the processing capabilities of deployed routers cannot easily be scaled to keep pace with increasing traffic. Instead, service providers must purchase additional or replacement routers to meet the demands of increased traffic.

30 Third, conventional monolithic router designs also have limited flexibility and extensibility. For example, the present invention recognizes that it would be desirable, in view of the rapid growth of Internet traffic, to

5 dynamically provision, configure, and/or reallocate access capacity to IP-based services. Because access capacity is necessarily limited and providing additional access capacity is a major cost component of networks, the enforcement of intelligent admission control policies and provision of differing qualities of service is vital to the efficient utilization of available access capacity. However, conventional edge routers are not capable of classifying a wide variety of traffic types while enforcing policy controls or of responding to dynamic requests for capacity, and this functionality is difficult to incorporate within currently deployed monolithic edge routers. The present invention accordingly recognizes that it would be desirable to provide the above as well as additional policy control, network monitoring, diagnostic, and security services in commercialized hardware, while permitting these services to be tailored to meet the needs of individual customers and service providers.

10
15 Fourth, because of the proprietary nature of router architectures and services, if a service provider deploys routers from multiple vendors in a communication network, the proprietary services implemented by the different router vendors will not necessarily inter-operate. Consequently, service providers are not able to purchase routers and switches from one vendor and purchase service control software from another vendor. Furthermore, a service provider cannot offer its communication network as a platform for a wholesale provider to offer value-added data services utilizing the existing base network capabilities.

20
25 In view of the foregoing and additional shortcomings in the prior art, the present invention recognizes that it would be desirable to introduce a new network access architecture that addresses and overcomes the limitations of conventional monolithic router architectures.

30

SUMMARY OF THE INVENTION

The present invention introduces a distributed network access system architecture including at least an external processor and a programmable access device. In a preferred embodiment, the network access system further includes an access router coupled to the programmable access device.

The external processor includes a service controller that provides at least one service for network traffic, a message processor that processes network messages for service processing by the service controller, and a programmable access device controller that programs the programmable access device in response to service controller processing. It is advantageous for the external processor to include primary and secondary service controllers for a particular service so that, if the primary service controller fails, the secondary service controller can support the particular service on the programmable access device. In preferred embodiments, the service controller further includes a reporting processor that provides an interface through which reporting messages received from the programmable access device can be communicated to the service controller and a signaling controller that forwards signaling messages to the network to establish requested network connections. The external processor preferably further supports a service policy interface through which the service controller can request policy decisions from a possibly remote policy server.

Thus, in accordance with the present invention, conventional monolithic, proprietary edge routers are replaced with a distributed network access system that allocates the functionality of traditional edge routers (as well as additional functionality) among three logical modules: a programmable access device, an external processor, and an access router. According to a preferred embodiment of the present invention, basic routing of packets between input and output ports of the access network is performed by the access router. However, forwarding and generic traffic conditioning functions, such as marking, policing, monitoring, shaping, and filtering, are implemented in the programmable access device, and service functions, such as message interpretation, signaling, admission control, and policy invocation, are implemented in the external processor. As detailed *infra*, this distribution of functionality results in numerous advantages, including improved scalability, flexibility, extensibility, interoperability, security, and service provisioning.

Additional objects, features, and advantages of the present invention will become apparent in the following detailed written description.

BRIEF DESCRIPTION OF THE DRAWINGS

The novel features believed characteristic of the invention are set forth in the appended claims. The invention itself however, as well as a preferred mode of use, further objects and advantages thereof, will best be understood by reference to the following detailed description of an illustrative embodiment when read in conjunction with the accompanying drawings, wherein:

Figure 1A is a metropolitan view of a prior art Internet service provider network containing aggregation and core routers;

Figure 1B is a metropolitan view of an Internet service provider network in accordance with the present invention;

Figure 2 depicts an illustrative embodiment of a communication network in accordance with the present invention;

Figure 3 is a more detailed block diagram of an exemplary embodiment of a programmable access device (PAD) in accordance with the present invention;

Figure 4 is a more detailed block diagram of an exemplary embodiment of an external processor in accordance with the present invention;

Figure 5A illustrates exemplary signaling between a programmable access device and an external processor during a switchover to a secondary service controller due to failure of the primary service controller;

Figure 5B depicts exemplary signaling between a programmable access device and an external processor during a switchover from a secondary service controller to a primary service controller following restoration of the primary service controller;

Figure 6 illustrates exemplary signaling in a network access system in accordance with the present invention to support service reservation utilizing Resource Reservation Protocol (RSVP);

5 **Figure 7A** is a state machine diagram illustrating the operation of an exemplary programmable access device during a TCP session;

10 **Figure 7B** is a diagram illustrating the operation of an exemplary programmable access device and associated service controller in the event of a TCP state memory full condition;

15 **Figure 7C** depicts exemplary signaling in a network access system in accordance with the present invention during TCP session establishment;

20 **Figure 7D** illustrates exemplary signaling in a network access system in accordance with the present invention during disconnection of a TCP session;

25 **Figure 7E** depicts exemplary signaling in a network access system in accordance with the present invention in response to an authorized request for a TCP session;

30 **Figure 7F** illustrates exemplary signaling in a network access system in accordance with the present invention when a TCP session times out;

Figure 7G depicts exemplary signaling in a network access system in accordance with the present invention when a TCP session abruptly closes;

Figure 8A illustrates exemplary signaling in a network access system in accordance with the present invention to establish a UDP (User Datagram Protocol) session having an enhanced quality of service (QoS) path;

Figure 8B depicts exemplary signaling in a network access system in

accordance with the present invention in the case where packets in a UDP session receive best-efforts delivery rather than enhanced QoS;

Figure 8C illustrates exemplary signaling in a network access system in accordance with the present invention to tear down a UDP session that has timed out;

Figure 9A depicts exemplary signaling in a network access system in accordance with the present invention during Session Initiation Protocol (SIP) call establishment;

Figure 9B illustrates exemplary signaling in a network access system in accordance with the present invention during SIP call termination;

Figure 9C depicts exemplary signaling in a network access system in accordance with the present invention to conclude a SIP call following detection of a time out by the network;

Figure 9D illustrates exemplary signaling in a network access system in accordance with the present invention to conclude a SIP call following detection of a time out by the programmable access device;

Figure 9E depicts exemplary signaling in a network access system in accordance with the present invention during SIP call negotiation;

Figure 10A depicts exemplary signaling in a network access system in accordance with the present invention to authorize registration of a multicast group;

Figure 10B illustrates exemplary signaling in a network access system in accordance with the present invention in response to an unauthorized attempt to register a multicast group;

Figure 10C depicts exemplary signaling in a network access system in accordance with the present invention in response to an authorized multicast group membership query;

5

Figure 10D illustrates exemplary signaling in a network access system in accordance with the present invention in response to an unauthorized multicast group membership query;

10

Figure 10E depicts exemplary signaling in a network access system in accordance with the present invention in response to receipt of authorized multicast packets from outside the network;

15

Figure 10F illustrates exemplary signaling in a network access system in accordance with the present invention in response to receipt of unauthorized multicast packets from outside the network;

20

Figure 10G depicts exemplary signaling in a network access system in accordance with the present invention in response to receipt of authorized multicast packets from the network; and

25

Figure 10H illustrates exemplary signaling in a network access system in accordance with the present invention to handle unauthorized multicast packets received from the network.

DETAILED DESCRIPTION OF A PREFERRED EMBODIMENT

Distributed Network Access System Architecture

With reference again to the figures and in particular with reference to **Figure 2**, there is depicted a high-level block diagram of a portion of a communication network **30** having a distributed network access system **31** in accordance with the present invention. As illustrated, communication network **30** may be coupled to equipment of a number of customers (one of which is represented by a customer router **32**) by an access line **34**. As in **Figure 1**, access line **34** may employ any of a number of commonly utilized transport network technologies, such as Ethernet, SONET, ATM and frame relay, and may further include unillustrated aggregation hardware.

As with conventional networks, communication network **30** includes one or more core communication links **38** (e.g., trunk lines) coupled to one or more core routers **36**. However, in contrast to conventional communication networks, such as that illustrated in **Figure 1**, customer router **32** does not interface to communication network **30** via a monolithic, proprietary edge router. Instead, customer equipment, such as customer router **32**, interfaces with communication network **30** via a network access system **31** that distributes the functions of traditional edge routers (as well as additional functionality) among three logical modules: a programmable access device (PAD) **40**, an external processor **42**, and an access router **44**. According to a preferred embodiment of the present invention, basic routing of packets between input and output ports of the access network is performed by access router **44** by reference to forwarding table **50** as determined by Exterior Gateway Protocol (EGP) and Interior Gateway Protocol (IGP) routing tables **52** and **54**. However, forwarding and generic traffic conditioning functions, such as marking, policing, monitoring, shaping, and filtering, are implemented in PAD **40**, and service functions, such as message interpretation, signaling, admission control, and policy invocation, are implemented in external processor **42**. Given this distribution of functionality, incoming and outgoing

packets are typically communicated between core communication links **38** and customer router **32** via PAD **40**, access router **44**, and core router **36** (and optionally additional switching the access network, such as an ATM or MPLS switch **60**). However, if the filtering functionality of PAD **40** detects packet

5 flows for which additional services are required, PAD **40** passes appropriate messages to external processor **42** for service processing via a Message, Reporting, and Control Interface (MCRI) **58**, which can be accessed via an Application Programming Interface (API) on PAD **40** and external processor

10 **42**. Distributing functionality between access router **44**, PAD **40**, and external processor **42** in this manner gives the service provider (or even third parties) the freedom to extend and modify existing services, create new services, or add more processing power to external processor **42** without adversely affecting the forwarding performance of PAD **40** and the routing performance or functionality of access router **44**.

15 To implement a desired functionality for PAD **40** and external processor **42**, the service provider (or even a customer or a third party) can define policy rules in the policy database **46** of one or more policy servers **48** (also referred to as a policy decision point (PDP)). Policy server **48** then

20 makes policy decisions that control the functionality and operation of PAD **40** and external processor **42** by reference to the policy rules stored in policy database **46**. Policy server **48** communicates policy decisions and associated configuration parameters for external processor **42** and/or PAD **40** to external processor **42** via a Service Policy Interface (SPI) **56**, which can be accessed,

25 for example, via an API on policy server **48** and external processor **42**. Communication via SPI **56** can employ any of a number of policy query protocols, including Common Open Policy Service (COPS) and Lightweight Directory Access Protocol (LDAP), which are respectively defined by Internet Engineering Task Force (IETF) RFCs 2748 and 2251, which are incorporated

30 herein by reference. External processor **42** relays configuration parameters for PAD **40**, if any, to PAD **40** via MCRI **58**.

As discussed further below, network access system **31** also permits the service provider (or even a third party) to deploy additional functionality in external processor **42** by developing a service controller to support the functionality and installing the service controller on external processor **42**.

5 Additional functionality can also be implemented in network access system **31** utilizing NMS (Network Management System) **72**, which is also referred to as an OSS (Operation and Support System). NMS **72** monitors, controls, reports alarms for, and configures (e.g., assigns an IP address to) each of the components of network access system **31** via interfaces **73-77**. NMS **72** also preferably includes
10 billing and accounting facilities that allocate costs for services to appropriate customers, for example, in response to messages from the service controllers in external processor **42**.

As further illustrated in **Figure 2**, network access system **31** of the
15 present invention permits flexibility in the placement and implementation of network switching. For example, an ATM or MPLS (Multi-Protocol Label Switching) network can be utilized to couple one or more PADs **40** to port of an access router **44** through an ATM or MPLS switch **60**, thereby permitting signaling and policing functional blocks **62** and **64** to be implemented
20 separately from access router **44**. If, however, signaling is implemented by access router **44**, switch **60** can be eliminated. Switch **60** can also alternatively be interposed between access router **44** and core router **36** as an aggregation switch. Furthermore, access router **44** may be implemented by an external processor **42** running routing software controlling a large PAD **40**.

25 Programmable Access Device (PAD)

Referring now to **Figure 3**, there is illustrated a high-level block diagram of the logical elements comprising an exemplary embodiment of a PAD **40** in accordance with the present invention. As noted above, PAD **40** is
30 a programmable access device containing required forwarding and packet classification functions along with other optional traffic conditioning functional modules that implement any desired combination of marking,

policing, monitoring, and shaping for incoming and outgoing packets. In a typical embodiment, PAD 40 is implemented as a combination of software and conventional router hardware that cooperate to provide the functionality of the illustrated modules. (In **Figure 3**, dashed line illustration is utilized to indicate optional functional modules.)

Generally speaking, the functional modules of PAD 40 are logically arranged in incoming (e.g., from customer router 32) and outgoing (e.g., to customer router 32) traffic paths, with the incoming path including packet header filter 80, marker/policer 82, monitor(s) 84, forwarding table 86, and output buffers and scheduler 88. The outgoing path similarly includes packet header filter 90, forwarding table 86, monitor(s) 92, marker/shaper 94, and output buffers and scheduler 96. The functions of all of these functional modules can be independently configured or programmed by an external processor 42 through MCRI 58.

Incoming packets received from customer router 34 at the external interface of PAD 40 are first processed by packet header filter 80, which distinguishes between various message types using any one or a combination of the protocol type, Source Address (SA), Destination Address (DA), Type Of Service (TOS), Diffserv Codepoint (DSCP), Source Port (SP), Destination Port (DP), and other fields of a packet (e.g., layer 4 and higher layer fields such as the SYN, ACK, RST, and FIN TCP flags) upon which packet header filter 80 is configured to filter. Importantly, in addition to filtering on layer-3 information, packet header filter 80 has the ability to identify higher layer (i.e., layer 4-7) message types or specific fields and forward those messages from/to external processor 42 based on the configured filter parameters. Thus, based upon its filter configuration and the fields of an incoming packet, packet header filter 80 directs the packet either to an external processor 42 via message interface 100 or to a specific marker/policer 82. It should also be noted that message interface 100 may also inject a packet specified by external processor 42 into either of packet header filters 80 and 90.

In response to receipt of a stream of packets from packet header filter **80**, marker/policer **82** polices the packet stream by applying one or more token or leaky bucket algorithms to determine whether the packet stream conforms to the traffic parameters established by control interface **104**. As a result of the policing function, marker/policer **82** may discard nonconforming packets, mark nonconforming packets (e.g., with a higher or lower priority), and/or count nonconforming packets, depending upon its configuration. If marking is required, marker/policer **82** may set bits in the Differentiated Services (DiffServ)/TOS byte in the IP packet header, and/or the 3-bit MPLS experimental field, and/or the 20-bit MPLS label field, and/or other fields as configured by control interface **104** for that particular packet stream.

Within the incoming path, one or more monitors **84** having different functions may optionally be included. For example, these monitors **84** may include a usage monitor that tracks statistics for different layer-2, layer-3, layer-4, and higher layer traffic types (e.g., to monitor a Service Level Agreement (SLA)). Monitors **84** may also include a fault/troubleshooting/debugging monitor that verifies conformance to standards and assists in code debugging and fault diagnosis by saving and reporting memory dumps and other related information to external processor **42** via reporting interface **102** and MCRI **58**. To regulate reporting messages, thresholds and other criteria can be set up to invoke a reporting event. The reporting messages sent to external processor **42** by monitors **84** may summarize usage information for a particular customer, report the occurrence of a high-priority traffic flow, alert external processor **42** to a large volume of out-of-band traffic, report on inactivity of a monitored flow, etc.

After processing by packet header filter **80** (and optionally by marker/policer **82** and monitors **84**), incoming packets are processed by forwarding table **86**. Forwarding table **86** maintains entries for each forwarding path, where each forwarding path is represented by packet flow attributes, such as

DA, SA, TOS, PT, SP, DP, the incoming port, and the corresponding output port to which PAD 40 forwards the packet through the access network toward access router 44. Utilizing these forwarding table entries, forwarding table 86 forwards packets to the appropriate output ports and passes the packets to output buffers and scheduler 88.

Output buffers and scheduler 88 buffer packets ready for transmission over communication network 30 and schedule the transmission of such packets. The buffering within output buffers and scheduler 88, which can comprise a single buffer or preferably multiple buffers, is preferably configured to support multiple QoS classes, or even QoS for each individual flow. For example, a percentage or a fixed amount of buffer space can be assigned to a queue serving a generic class of traffic or a particular traffic flow classified by DA, SA, TOS, PT, SP and/or DP. The packet scheduler then applies weighted round robin and/or other algorithms to the multiple queues multiplexing the different traffic flows. The combination of the buffering and scheduling mechanisms can place a limit on the queuing delay to transmit a packet through PAD 40, thus guaranteeing a bounded value for the QoS jitter parameter for selected traffic flows. Buffers and scheduler 88 can also apply CBQ (Class-based Queuing), WFQ (Weighted Fair Queuing), WRR (Weighted Round Robin) or other link sharing algorithms to optimize communication.

The outgoing path through PAD 40 is similar to the incoming path, except for the inclusion of marker/shaper 94 in lieu of marker/policer 82. As will be appreciated by those skilled in the art, marker/shaper 94 discards nonconforming packets, sends marked packets to appropriate output buffers for the various queues serving different QoS classes for individual flows within output buffers and scheduler 96 to control the delay, jitter and loss of an outgoing packet flow, or simply counts non-conforming packets.

A PAD 40 in accordance with the present invention can be deployed at

a number of locations in a network to perform traffic management and policy control. For example, a PAD 40 can be placed in a customer access network (e.g., fiber, xDSL, cable modem, WAP (Wireless Access Protocol), etc.) connecting customer equipment to a provider network controlled by regionally located external processors 42. Alternatively, a PAD 40 can be deployed at a service provider's Point of Presence (POP), interfacing with a customer site over a private line, FR, ATM, MPLS or Ethernet access network. A PAD 40 in accordance with the present invention can also be located facing a server farm that can be in the provider's POP or in a customer's site. The manner in which such a distributed network of PADs 40 forwards packets to access router 44 is configured in forwarding table 86 by an external processor 42 using control interface 104.

External Processor

With reference now to **Figure 4**, there is illustrated a high-level block diagram depicting the logical elements comprising a preferred embodiment of an external processor 42 in accordance with the present invention. External processor 42 can be implemented utilizing either or both of software and hardware, which hardware can include general purpose computing hardware or special purpose hardware. Although software-only implementations of external processor 42 that execute on the hardware of a PAD 40 are possible, external processor 42 is preferably implemented with stand-alone hardware to allow the service processing performed by external processor 42 to be easily scaled by the installation of additional and/or higher performance external processor hardware. Separation of external processor 42 from the forwarding function performed by PAD 40 also allows dynamic allocation of processing resources within external processor 42 in response to access traffic patterns without degrading the forwarding performance of PAD 40. Moreover, as shown in **Figure 4**, implementing external processor 42 separately from PAD 40 permits an external processor 42 to service multiple PADs 40a and 40b (which may be located at physically distant locations) or, alternatively, permits multiple external processors 42 to service a single PAD 40. The association of

a single PAD 40 with multiple external processors 42 provides enhanced fault tolerance.

In a preferred embodiment, external processor 42 primarily performs three types of processing: invoking policy services, signaling to setup and teardown access network connections, and configuring one or more associated PADs 40. To coordinate these different processing functions, external processor 42 contains one or more service controllers 120, which each preferably controls these three functions for a respective type of service. For example, service controllers 120 may include any or all of a Conference Call Service Controller (CCSC), an E-Commerce Service Controller (ECSC), an IP Telephony Service Controller (IPTELSC), a Reserved Bandwidth Service Controller (RBSC), and a Multicast Service Controller (MSC). Such service-specific control can be implemented either with dedicated service controllers or with generic controllers that each support service-specific APIs. Each service controller preferably maintains a session table recording all of its active sessions with a PAD 40.

As further shown in Figure 4, external processor 42 includes, for each associated PAD 40, a respective PAD controller 124. Under the direction of service controller(s) 120, each PAD controller 124 configures forwarding table 86, packet header filters 80 and 90, marker/policer 82, marker/shaper 94, monitors 84 and 92, and output buffers and schedulers 88 and 96 of the associated PAD 40 by invoking commands or scripts understood by control interface 104. External processor 42 also contains a respective message processor 122 for each associated PAD 40. Message processors 122 each communicate messages to and from the message interface 100 of the associated PAD 40. Upon receipt of a message from a PAD 40, which is usually a message received from the customer router 32, a message processor 122 parses the message and informs the appropriate service controller (as determined by the type of service) of its contents. As indicated in Figure 4, at any given time not all PADs 40 may be configured to handle all service types;

thus, a particular service controller **120** may communicate messages with less than all PADs **40**.

As indicated by dashed line illustration, external processor **42** may further include a reporting processor **126** for each PAD (e.g., PAD **40a**) containing optional monitors **84** or **92** and reporting interface **102**. Reporting processor **126** receives report messages from the corresponding PAD's reporting interface **102** and transmits appropriate report messages to one or more service controllers **120**. Reporting processor **126** can also configure the reporting interface **102** of a PAD **40** to specify acceptable type(s) of reporting messages, content of reporting messages, reporting events, etc.

Upon receipt of a report message from reporting processor **126** or another message type from a message processor **122**, a service controller **120** translates the message into one or more policy queries and transmits the policy query or queries to policy server **48** via SPI **56**. For example, if SPI **56** employs COPS, a service controller **120** will translate RSVP and SIP messages to COPS (RSVP) and COPS (SIP) messages, respectively. A service controller **120** may also pass a message to another service controller **120** to obtain additional services via interface **121**.

In response to receipt of a policy decision from policy server **48**, service controller **120** may inject one or more packets into a traffic flow via message processor **122**, configure a PAD **40** via PAD controller **124** or control signaling inside or outside communication network **30** via signaling controllers **128a** and **128b**. Signaling controllers **128** support signaling protocols (e.g., RSVP, Label Distribution Protocol (LDP), Private Network-Network Interface (PNNI), frame relay or ATM User Network Interface (UNI), etc.) to setup or tear down a Virtual Connection (VC) or Label Switched Path (LSP) across the network. A VC or LSP setup by a signaling controller **128** may have a specified QoS.

To reduce the number of messages passed between service controllers 120 and policy server 48 via SPI 56, service controllers 120 each preferably cache frequently used policy rules in a respective policy cache 130. Accordingly, if policy information for a policy query arising from an incoming message is already cached, a service controller 120 can forego sending a query to the policy server 48 and make a policy decision by reference policy rules cached in its policy cache 130. In addition, when a service controller 120 queries policy server 48 with a new service request, the service controller 120 may request policy server 48 to dump all the related policy information from policy database 46 to its policy cache 130. However, there is a tradeoff between the number of policy queries and the cache refresh frequency and the amount of policy information downloaded from policy server 48 at each refresh. The objective is to cache policies for IP services requiring intensive policy queries, such as SIP calls, while avoiding caching policy lookups for other sessions (e.g., TCP sessions) that generally generate only one policy query in their lifetime.

Network Access System Interfaces

As described above, the network access system of the present invention supports at least two interfaces: SPI 56 and MCRI 58. Each of these interfaces is examined in turn *infra*.

As summarized in Table I below, SPI 56 preferably supports at least one message type that is sent from the service controllers 120 of external processor 42 to policy server 48, namely, queries regarding policy requirements. Such policy queries preferably include a flag that can be set to request that policy server 48 dump the policy rules for the query into the policy cache 130 of the requesting service controller 120.

SPI 56 also preferably supports at least five message types that are sent from policy server 48 to service controllers 120. The message types sent via SPI 56 from policy server 48 to service controllers 120, which are also summarized in Table I, include transaction approval and rejection messages, messages specifying

configuration parameters, and messages containing policy information to be cached in policy caches 130. In addition, policy server 48 can send messages to external processor 42 that indicate settings for session level parameters in PAD 40. As understood by those skilled in the art, one important session level parameter is an inactivity timer that counts time that has elapsed since a packet has been received in an active session and, if more than a specified amount of time has elapsed, signal that the session should be closed for lack of activity.

TABLE I

Service Controller to Policy Server	Query policy requirements with or without request to cache policy information
Policy Server to Service Controller	Approve transaction
	Reject transaction with a cause indication
	Provide configuration parameters
	Dump the policy information into policy caches
	Set session level parameters

Communication between policy server 48 and external processor 42 over SPI 56 can be either solicited or unsolicited. In the unsolicited mode operation, policy server 48 sends configuration parameters for external processor 42 and PAD 40 to external processor 42 in the absence of a policy request. Alternatively, in the solicited mode of communication, policy server 48 sends policy decisions and configuration parameters to external processor 42 in response to a policy request. As shown in **Figure 2**, policy requests can either be sent by external processor 42 or, because SPI 56 preferably employs an open policy query protocol, by a third party's (e.g., a customer's policy server). In either case, policy server 48 receives a policy request via SPI 56. The policy request typically specifies a requested service and requires a response indicating whether the requested service is to be provided given the parameters of the service (e.g., identity of the requestor, type and amount of service requested, etc.), and if so, the appropriate configurations for the service. In response to receipt of a policy request, policy server 48 interrogates policy database 46 to access the appropriate policy rules given the parameters provided in the policy request. Policy server 48

then makes policy decisions for the policy request utilizing the accessed policy rules and usage information. For example, policy server **48** may track the amount of bandwidth reserved by a particular customer (a policy rule) and approve or reject a new service request by comparing the amount of remaining reserved
5 bandwidth that is unutilized (usage information) and the amount of bandwidth required to provide the requested service. Policy server **48** then supplies the resulting policy decisions, which can be “approve,” “reject,” and/or configuration of session level parameters for external processor **42** and PAD **40**, to external processor **42** via SPI **56**.

Turning now to MCRI interface **58**, Table II, below, summarizes message types that are sent by PAD **40** to external processor **42**. As indicated, these message types can be conveniently categorized by reference to which of message interface **100**, reporting interface **102**, and control interface **104** is the source of
15 the messages.

As noted above, message interface **100** of PAD **40** passes messages captured by packet header filters **80** and **90** to message processor **122** of external processor **42**. The messages that are passed to message processor **122** can be
20 filtered out of the incoming or outgoing packet flows based upon SA, DA, PT, SP, DP and/or other packets fields such as TCP flags (e.g., SYN, ACK, RST, FIN, etc.), as well as layer 4-7 message types and fields.

Control interface **104** sends control reply messages to PAD controller **124**
25 in response to receipt of a control command message. If the command completes successfully (e.g., a configuration of a monitor **84** is successfully updated), control interface **104** returns a command acknowledgement to PAD controller **124**. However, if a command cannot be completed due to improper syntax, unavailability of required resources, etc., then control interface **104** notifies PAD
30 controller **124** of the command failure with a command failure indication.

Reporting interface **102** of PAD **40** sends reporting messages to reporting

processor **126** of external processor **42**. The reporting messages tabulated in Table II include messages providing information about monitored sessions, messages related to communication between PAD **40** and service controllers **120** of external processor **42**, and messages containing statistics collected by monitors **84** and **92**. For certain protocols, such as TCP and SIP, PAD **40** implements a state machine for each active session. If a TCP state machine detects that a particular active TCP session has had a number of retransmissions in excess of an established retransmission threshold, reporting interface **102** sends a message notifying message processor **122** of external processor **42** that the TCP retransmission threshold has been exceeded, thus indicating that the TCP session has failed. Reporting processor **126** similarly reports other session failures such as the expiration of an inactivity timer on certain IP protocol sessions, such as TCP and SIP. For other data flows (e.g., UDP sessions) that do not have associated state machines to ensure reliability, reporting interface **102** of PAD **40** sends "Activity Detected" reporting messages when activity is detected in the session.

In the preferred embodiment of the present invention represented by Table II, the connection state between a PAD **40** and external processor **42** is indicated by keepalive messages that are periodically exchanged between each PAD **40** and the associated external processor **42**. The absence of a keepalive message from a PAD **40** indicates the failure of the connection between the PAD **40** and external processor **42** and/or the failure of PAD **40** itself. Such keepalive messages are preferably transmitted between reporting interface **102** and reporting processor **126**; however, if no reporting interface is implemented, keepalive messaging can alternatively be provided by message interface **100**.

Service controllers **120** within external processor **42** are also subject to failure or dynamic reallocation to different services (e.g., for load balancing reasons). In the event of a failure of an external processor **42** supporting multiple service controllers **120** or a redistribution of service responsibility between service controllers **120**, the new service controller **120** to which responsibility for a

session is transferred must receive state information pertaining to all of the active sessions of the old service controller **120**. Accordingly, in the event of a so-called switchover that assigns a PAD **40** to a preferred external processor **42**, PAD **40** preferably reports the state information for active sessions to reporting processor **126** of external processor **120** in a state synchronization message. Making PAD **40** responsible to provide session state information to the new service controller **120** in this manner advantageously relieves service controllers **120a** and **120b** from the responsibility of synchronizing session states, which is a message-intensive process that degrades service controller performance during normal operation. This aspect of the design achieves fault tolerance to hardware, software, and network failures.

Table II finally lists two exemplary reporting messages triggered by the monitoring performed by optional monitors **84** and **92**. First, reporting interface **102** can provide general usage statistics on a per-customer basis. Service controllers **120** in external processor **42** can utilize this statistical information to measure conformance to SLAs and detect certain events of interest. Second, reporting interface **102** can specifically indicate in a reporting message that a customer's predefined traffic threshold has been exceeded. A service controller **120** in external processor **42** can utilize this information to allocate additional resources to the customer's traffic (e.g., to ensure conformance to a SLA) or can notify billing server **72** that an adjustment should be made in customer billing (e.g., if billing is based upon usage). Of course, additional reporting messages can also be defined.

TABLE II

Message	Filtered messages
Control	Command acknowledgement
	Command failure indication
Reporting	TCP retransmit threshold exceeded
	TCP state memory full
	Inactivity timer expired
	Activity detected
	Keepalive exchange

	State synchronization in event of a service controller switchover Traffic threshold exceeded Usage statistics
--	---

Referring now to Table III, messages types sent to PAD 40 from message processor 122, PAD controller 124, and reporting processor 126 of external processor 42 via MCRI 58 are summarized. In the interface embodiment shown in Table III, message processor 122 can send at least two types of messages to message interface 100. First, message processor 122 may send message interface 100 one or more packets to be injected into either the incoming or outgoing packet flow. Second, message processor 122 may send message interface 100 a message indicating packet field flags in message interface 100 to be set or reset to cause message interface 100 to pass or to prevent message interface 100 from passing particular messages to message processor 122 based upon the contents of various packet fields, such as SA, DA, PT, SP, DP, etc.

As set forth in Table III, the control messages sent from PAD controller 124 to control interface 104 via MCRI 58 include a number of configuration messages that enable a PAD controller 124 to configure any of the filtering, marking, policing, monitoring, buffering, scheduling, shaping and forwarding functional modules 80-96 of PAD 40 through control interface 104. In particular, output buffers and schedulers 88 and 96 can be configured to allocate a number of buffers or size of buffer per traffic class or traffic flow or to implement CBQ, WFQ, WRR or other buffer scheduling algorithms. PAD controller 124 can also configure marker/shaper 94 to employ static or adaptive shaping algorithms and can configure marker/shaper 94 to implement shaping on a per traffic flow or per traffic class basis. PAD controller 124 can further configure forwarding table 86 in response to a request by a service controller 120 in order to enable the service controller 120 to associate a data flow with an ATM SVC or a MPLS LSP.

In addition to general control messages utilized to configure functional modules 80-96, MCRI 58 also supports various control messages utilized to configure particular features of the functional modules of PAD 40. For example,

packet header filters **80** and **90** can be configured to drop multicast packets from an unauthorized source, to admit or deny source routing for a data flow, or to admit only packets with specific source addresses. In addition, PAD controller **124** can update forwarding table **86** with SVC and LSP paths setup by a service controller **120** using a signaling controller **128**. Reporting interface **102** can be configured via a “Set reporting flags” control message to enable or disable reporting of selected events by setting or resetting reporting flags corresponding to these events. PAD **40** can also be configured via MCRI control messages to set the TCP retransmission notification threshold, inactivity timers, activity timers and traffic threshold discussed above. Finally, the processing resources of PAD **40** and output buffers and scheduler **88, 96** can be configured by an “Allocate Resource” control message sent via MCRI **58** and control interface **104** to dynamically allocate resources, such as bandwidth, queues, and processing time slices, to a customer interface, a packet flow, a class, or a multicast group.

The reporting messages sent from reporting processor **126** of external processor **42** to PAD **40** are generally limited to exchanging keepalive messages with reporting interface **102**. The continued exchange of keepalive messages informs PAD **40** that the associated service controller **120** is operative. If PAD **40** fails to receive keepalive messages from a service controller **120**, PAD **40** initiates a switchover of service to a secondary service controller **120**, as discussed further below.

TABLE III

Message	Inject packet into ingress or egress packet flow Set pass/no pass flag of message interface
Control	Configure packet header filter Configure marker Configure policer Configure forwarding table Configure output buffers and scheduler Configure shaper Drop multicast packets from specified source Admit/deny source routing option Set TCP retransmission threshold Set session inactivity timer

	Set activity timer and level Set traffic reporting threshold Allocate resource Set reporting flags Set SVC, PVC or LSP Delete TCP session
Reporting	Keepalive exchange

Fault Tolerance

To prevent an interruption in service in the event of a service controller failure, each service is preferably supported by both a primary service controller that ordinarily provides the service and a secondary service controller that can provide the service if the primary service controller fails or if the connection between a PAD and the primary service controller is lost. In a preferred embodiment of the present invention, the primary and secondary service controllers reside on separate external processors **42** diversely connected via the access network. In response to detecting failure of communication with the primary service controller, PAD **40** performs a switchover to the secondary service controller.

Referring now to **Figure 5A**, there is depicted a time-space diagram showing exemplary network access system signal to switchover the provision of service from a failed primary service controller to a secondary service controller in accordance with the present invention. In **Figure 5A**, it is assumed for the purpose of illustration that service controller **120a** is the primary service controller and service controller **120b** is the secondary service controller.

During normal operation, a PAD **40** employs a reliable communication protocol (e.g., TCP) to exchange information with service controllers **120a** and **120b** of the associated external processor **42**. As noted above, a keepalive message is periodically exchanged between external processor **42** and PAD **40** to keep the TCP session active. When PAD **40** detects a timeout of the keepalive message, meaning that the connection to primary service processor **120a** has failed, PAD **40** attempts to set up a TCP session with secondary service controller **120b**, as shown in **Figure 5A** by PAD **40** sending a synchronizing segment (SYN)

to secondary service controller **120b**. If PAD **40** is unsuccessful in connecting with secondary service controller **120b** (e.g., no SYN ACK is received from the secondary service controller **120**), PAD **40** stops accepting new sessions and maintains the state and service for all currently active sessions until
5 communication with primary service controller **120a** is restored.

If, however, PAD **40** successfully established a TCP session with secondary service controller **120b** (e.g., as indicated by receipt of a SYN ACK and return of an ACK), PAD **40**, which maintains a state machine for each active
10 session, uploads state information for all of its active sessions controlled by failed primary service controller **120a** to secondary service controller **120b**. Once receipt of the state information by secondary service controller **120b** is acknowledged by an ACK message, PAD **40** initiates the exchange of keepalive messages with secondary service controller **120b**. Thus, service is not interrupted
15 by the failure of a single service controller **120**, and no synchronization is required between service controllers **120a** and **120b**.

Communication between PAD **40** and secondary service controller **120b** may continue and not revert to primary service controller **120a** if a non-reverting
20 behavior is desired. However, it is presently preferred for communication to revert to primary service controller **120a**, if possible, to maintain load balancing of service controller processing across the distributed PADs.

Referring now to **Figure 5B**, there is depicted a time-space diagram
25 showing exemplary signaling between a programmable access device and an external processor during a switchover from a secondary service controller to a primary service controller following restoration of the primary service controller. The reversion process begins with primary service controller **120a** sending a SYN segment to PAD **40** to reestablish a TCP session. PAD **40** responds to receipt of
30 the SYN with a SYN ACK, which primary service controller **120a** confirms with an ACK. Once a TCP session has been initiated, PAD **40** uploads the states of active sessions to primary service controller **120a**, and service controller **120a**

confirms receipt of the session states with an ACK.

After the session states have been successfully restored to primary service controller **120a**, PAD **40** notifies secondary service controller **120b** that primary service controller **120a** has been restored via a “Prepare to shutdown” message. PAD **40** then closes the TCP session with secondary service controller **120b** via a pair of FIN (i.e., finished) and ACK handshakes, the first half of which is originated by PAD **40** and the second half of which is originated by secondary service controller **120b**. After the TCP connection is closed, secondary service controller **120b** deletes all the state information related to the sessions transferred to primary service controller **120a**. PAD **40** thereafter resumes keepalive exchanges with primary service controller **120a**.

Metropolitan Implementation

With reference now to **Figure 1B**, there is depicted an exemplary metropolitan implementation of an Internet Service Provider (ISP) network including a distributed network access system in accordance with the present invention. **Figure 1B** illustrates physical interconnections of components, rather than logical (e.g., network) connections, as shown in **Figure 2**.

Starting from the left hand side, customer LANs **14** interconnect either to a lowest level access network (e.g., TDM, ATM, or Ethernet) among metropolitan access networks **16'** or directly to a PAD **40**. As shown, PADs **40** may also be located at higher levels in the aggregation network hierarchy. Engineering economic and/or performance considerations determine placement of PADs **40**. For example, aggregation of a minimum amount of traffic or the need to access a low speed access link may drive placement of a PAD **40** to higher and lower access network levels, respectively.

As discussed above, PADs **40** perform policy enforcement, thus relieving the aggregation routers (i.e., access routers **44**) of some workload. Policy determination is also removed from the aggregation routers and is instead located

in redundant external processors **42** and PDPs **46**. For most implementations, external processors **42** would typically be deployed in a distributed manner to each metropolitan area, while PDPs **46** would be deployed more sparsely on a regional basis. As a result of relieving some of the workload of aggregation routers, access routers **44** can be scaled to handle larger traffic capacities because they are optimized to handle the simpler, yet essential, task of Internet routing. The capabilities of the ISP network are also expanded because PADs **40**, external processors **42**, and PDPs **46** implement not only the functionality of state-of-the-art edge routers, but also a number of functions not currently available in monolithic router designs.

In order to further illustrate aspects of the present invention, examples of network access system signaling and messaging for various operating scenarios are described below with reference to generic space-time drawings. The examples illustrate exemplary implementations of network-level signaling, connection-oriented and connectionless transport protocols, application-level communication, and policy-based multicast service management.

Network-Level Signaling Example

With reference now to **Figure 6**, there is illustrated a time-space diagram depicting exemplary network-level signaling utilized to obtain a service reservation through the use of the Resource Reservation Protocol (RSVP). In the illustrated example, a customer application initiates the reservation process by sending a RSVP PATH message to PAD **40**. For example, the customer application may request a path of specified bandwidth at a particular time. As shown in **Figure 6**, packet header filter **80** of PAD **40** captures the RSVP PATH message based upon RSVP protocol type (i.e., PT=46) and forwards it to the appropriate service controller **120** (which in this example is referred to as a Reserved Bandwidth Service Controller (RBSC)) **120** within external processor **40**.

In response to receipt of the path message, RBSC 120 transmits an appropriate policy query to policy server 48 via SPI 56 (which in this case is assumed to implement COPS) to determine whether the reservation service is authorized for this customer. If policy server 48 returns a policy decision to RBSC 120 approving the reservation service for this customer, RBSC 120 returns a RSVP PATH message to PAD 40, which sends the PATH message downstream to the egress point of the network.

If the receiver at the far end of the network also approves the reservation, the receiver responds by transmitting a reservation (RESV) message to PAD 40, which passes the RESV message to RBSC 120. In response to the RESV message, RBSC 120 invokes another policy query to policy server 48 to ascertain whether the bandwidth requirements specified by the RESV message are authorized for this customer. In response to this second query, policy server 48, which tracks allocated bandwidth for each customer, determines whether the currently allocated bandwidth plus the requested bandwidth is less than the maximum authorized bandwidth for this customer. If so, policy server 48 notifies RBSC 120 with a policy decision indicating approval. RBSC 120 then initiates appropriate ATM or MPLS signaling to set up a RVC or LSP utilizing one more signaling controllers 128. After RBSC 120 receives confirmation of the requested path from the network, RBSC 120 configures packet header filter 80 and forwarding table 86 of PAD 40 to transmit packets in the customer's flow over the established SVC or LSP. In addition, RBSC 120 returns the RESV message to PAD 40 using message interface 100, which sends the RESV message upstream to the customer application. RBSC 120 also sends a CONFIRM message downstream to the receiver via PAD 40 to complete the handshake utilized to set up the SVC or LSP.

Connection-Oriented Transport Examples

With reference now to **Figures 7A-7G**, there are depicted a TCP state machine and time-space diagrams of various TCP events that together illustrate the handling of connection-oriented transport protocols by a network access

system in accordance with the present invention. Referring first to **Figure 7A**, a preferred embodiment of a state machine maintained for a TCP session on a PAD **40** is depicted. As shown, TCP state machine **140** includes two states: an idle state **142** in which there is no active TCP session and an active state **144** in which there is an active TCP session. The operation of state machine **140** maintains TCP session state during four TCP processes, including (1) opening a TCP session in response to a synchronizing segment (SYN), (2) closing a TCP session in response to a finished (FIN) message, (3) closing a TCP session that has timed out and (3) closing a TCP session in response to a reset (RST) message. In **Figure 7A**, messages associated with each of these operations are identified by corresponding legends (e.g., “1.x” for a TCP session open, “2.x” for a TCP session close in response to a FIN message, etc.) and are further time-ordered by alphabetic designations (e.g., “1.a” precedes “1.b,” etc.).

As illustrated, opening of a TCP session is initiated when state machine **140** is in idle state **142** and PAD **40** receives a SYN segment. As illustrated at reference numeral **150**, packet header filter **80** captures the initial SYN message received from the customer and passes it to the service controller **120** within external processor **42** that is designated to handle TCP services. In response to receipt of SYN message, service controller **120** queries policy server **48** regarding a TCP session for this customer. If service controller **120** receives a policy decision indicating approval of the TCP session, service controller **120** returns the SYN segment to PAD **40** as indicated at reference numeral **152**. In response to receipt of SYN message from service controller **120**, state machine **140** changes state from idle state **142** to active state **144**. PAD **40** forwards the SYN segment to the receiver specified by the destination address and receives a SYN, ACK segment from the receiver, as shown at reference number **154**. The sender completes the three-way handshake required to open the TCP session by replying with an ACK message, as depicted at reference numeral **156**. PAD **40** passes the ACK message representing the success of the handshake to service controller **120**, as shown at reference numeral **158**. Receipt of the ACK message notifies service controller **120** that the TCP session is open and causes service controller **120** to

add the TCP session to its active session table. Service controller **120** then sets an inactivity timer and other parameters of this TCP session in PAD **40** and returns the ACK message to PAD **40**, as also indicated at reference numeral **158**.

Thereafter, data can be transmitted between the customer and the receiver via the active TCP session, as shown at reference numeral **159**.

To close an active TCP session, either the customer or receiver can send PAD **40** a FIN message. In response to receipt of the FIN message, PAD **40** resets TCP state machine **140** to idle state **142** as shown at reference numeral **160**. PAD **40** then passes the FIN message to service controller **120** as shown at reference numeral **162**. The FIN message notifies service controller **120** that the TCP connection is inactive and causes service controller **120** to delete the TCP session from its active session table. As illustrated, PAD **40** forwards the FIN message to its destination (i.e., either the customer or receiver), which responds with an ACK message and a FIN message **164**. The source then responds the last FIN message with an ACK message **166**. In response to receipt of the last ACK message, PAD **40** deletes the state machine **140** for the TCP session.

As further illustrated in **Figure 7A**, PAD **40** will also close an active TCP session if the inactivity timer for the TCP session expires. In response to expiration of the inactivity timer for an active TCP session, PAD **40** transitions state machine **140** from active state **144** to idle state **142**, as illustrated at reference numeral **170**. PAD **40** also reports a timeout error to service controller **120**, as shown at reference numeral **172**. In response to receipt of the timeout error message, service controller **120** deletes the TCP session from its active session table and updates the configuration of PAD **40** to remove the inactivity timer and other configuration information associated with the TCP session. PAD **40** then deletes the state machine **140** for the TCP session.

PAD **40** also closes an active TCP session in response to receiving a reset (RST) message from either party to a TCP connection. In response to receipt of the RST message, PAD **40** transitions state machine **140** from active state **144** to

idle state **142**, as shown at reference numeral **180**. PAD **40** also passes the RST message to service controller **120**, as shown at reference numeral **182**. In response to receipt of the RST message, service controller **120** passes the RST message back to PAD **40** to acknowledge receipt of RST and successful deletion of the TCP session, as also shown at reference numeral **182**. PAD **40** then deletes the state machine **140** of the TCP session and forwards the RST message to the other party of the TCP session.

In order to promote efficient operation of PAD **40** and service controller **120**, it is desirable to minimize the amount of messaging there between. Accordingly, PAD **40** only forwards the last ACK messages to service controller **120** if required to open a TCP session. In addition, PAD **40** only passes the first SYN, FIN segment received in a session to service controller **120**. In this manner, excessive messaging is avoided, even though the functions of PAD **40** and service controller **120** are distributed.

In the preferred embodiment, PAD **40** needs only keep active state information for TCP session for which service controller **120** configures value-added services. In other words, PAD **40** will not keep state information for best-effort TCP sessions. This greatly reduces the required memory size on PAD **40** for keeping TCP state information (e.g., state variables for packet header filters **80** and **90** and monitors **84** and **92**). Also, since there may be a large number of active TCP sessions, the delete TCP session message given in Table III allows service controller **120** to decide which TCP sessions will receive value-added service in the event that TCP session state memory is full.

As illustrated in **Figure 7B**, PAD **40** sends a TCP state memory full message **186** to service controller **120** through the reporting interface **102** in response to detecting a TCP state memory full event **184**. State memory full event **184** may result from depletion either of storage for packet header filter state variables or of storage for monitor state variables. In response to receipt of TCP

state memory full message **186**, service controller **120** records the TCP state memory status of PAD **40**.

When customer router **32** initiates another value-added TCP session by sending a SYN message **188**, PAD **40** passes the SYN message to service controller **120** through the message interface **100**, as shown at reference numeral **190**. In response to receipt of the SYN message, service controller **120** checks the TCP state memory status of PAD **40**. Since the TCP state memory status is full, service controller **120** decides whether or not to allow the new TCP session to overwrite existing value-added TCP sessions based on some pre-installed policies. For example, service controller **120** may assign each value-added service a priority and allow sessions of higher relative priority to overwrite lower priority TCP sessions. Alternatively or in addition, service controller **120** may permit the new TCP session to overwrite the TCP session having the longest period of inactivity.

If the new TCP session is not allowed to overwrite any existing TCP session, service controller **120** ignores the SYN message. As a result, PAD **40** does not install any state information for the new TCP session, and PAD **40** provides best-effort service to the new TCP session. If, however, service controller **120** decides that the new TCP session can overwrite another TCP session, service controller **120** sends a Delete TCP session message **192** to PAD **40** through control interface **102**. PAD **40** responds by deleting an existing TCP session from its TCP state memory, as indicated at reference numeral **194**. The process illustrated in **Figure 7A** at reference numerals **150-159** is then performed to install the new TCP session in the state memory of PAD **40**.

Given the exemplary TCP state machine depicted in **Figure 7A**, several examples of TCP signaling will now be described with reference to **Figures 7C-7G**. Referring first to **Figure 7C**, exemplary signaling utilized to establish a TCP session through a network access system in accordance with the present invention is shown.

As illustrated, to open a TCP session, a client application first issues an open command that informs the protocol stack that the application desires to open a connection to a server at a specified port and IP address (e.g., when accessing a web page). The TCP agent at the client site then selects an initial sequence number (800 in this example) and transmits a synchronizing segment (SYN) carrying the selected sequence number. When the SYN segment arrives, packet header filter **80** in PAD **40** detects, based upon the specified destination IP address and port number (PT=6, Port = 80), that the SYN segment is intended to initiate a mission-critical e-commerce TCP session. Accordingly, packet header filter **80** passes the SYN segment to an e-commerce service controller (ECSC) **120**. ECSC **120** responds to the SYN segment by querying policy server **48**, for example, utilizing an LDAP request.

In response to policy server **48** indicating approval of the TCP session, for example, via an LDAP APPROVE message, ECSC **120** returns the SYN segment to PAD **40**. When PAD **40** receives the SYN segment from ECSC **120**, PAD **40** spawns a new TCP state machine and sets it to active state **144**. PAD **40** then sends the SYN segment downstream to the server specified in the SYN segment.

When the SYN segment is received at the server, the server's TCP agent picks an initial sequence number (400 in this case) and sends a SYN segment containing the selected initial sequence number and an ACK to PAD **40**. The ACK message specifies that the first data byte sent by the client should be numbered 801. It should be noted that while the SYN and ACK messages sent by the server are forwarded by PAD **40** to the customer application, these messages need not be forwarded to ECSC **120**.

When the TCP agent at the client receives the SYN/ACK message, the TCP agent returns an ACK message of 401, meaning that the first data byte sent by the server should be numbered 401. This ACK message is passed by PAD **40** to ECSC **120** to notify ECSC **120** that the three-way handshake is successful and

the TCP session is open. ECSC **120** then adds the TCP session into its active session table and configures PAD **40** with an allowed number of TCP retransmissions and appropriate inactivity timer setting. ECSC **120** may also set marker/policer **82** to mark packets belonging to this TCP session as high priority. ECSC **120** then returns the ACK segment to PAD **40**, which sends the ACK segment to the destination server to inform the receiver that the TCP session is open. Once the customer's TCP agent informs the client application that the TCP connection is open, the client and server can begin exchanging data in the TCP session.

With reference now to **Figure 7D**, there is depicted a time-space diagram that illustrates exemplary network access system signaling to close a TCP connection in accordance with the present invention. While either side of a TCP connection can initiate disconnection of TCP session, in the example shown in **Figure 7D**, the server application initiates closure of the TCP session by instructing its TCP agent to close the connection. Accordingly, the server's TCP agent sends a FIN segment, informing the client application that it will send no more data. In response to receipt of FIN segment, PAD **40** resets the TCP state machine for the connection to idle state **142** and passes the FIN segment to ECSC **120**. ECSC **120** responds by deleting the TCP session from its active session table and by configuring PAD **40** to stop marking packets for this TCP session and to remove the session's inactivity timer and retransmission settings. PAD **40** also forwards FIN segment to the client, which acknowledges receipt of the FIN segment with an ACK that is passed to the server by PAD **40**. The client application then commands its TCP agent to close the session. The client's TCP agent therefore sends a FIN message to the server's TCP agent via PAD **40**. The server's TCP agent responds to the client's FIN message with an ACK that indicates to PAD **40** that the three-way handshake to close the TCP session is successful. PAD **40** accordingly deletes the state machine for the TCP session and forwards the ACK message to the client. Meanwhile, the server's TCP agent notifies the server application that the connection is closed.

Referring now to **Figure 7E**, there is illustrated a time-space diagram showing exemplary network access system signaling in accordance with the present invention in response to a request for an unauthorized TCP session. As can be seen by comparison of **Figure 7E** to **Figure 7C**, the process is identical up until the point at which policy server **48** returns an LDAP policy decision to ECSC **120** denying the TCP session. Policy server **48** may deny the TCP session, for example, because the network lacks sufficient resources to support the requested TCP session or because the client has not subscribed to the requested high priority e-commerce service. Following denial of the TCP session, ECSC **120** issues a reset (RST) segment to PAD **40**, which sends the RST segment upstream to the TCP agent at the client. When the client's TCP agent receives the RST segment, the client's TCP agent aborts the session. It should be noted that because PAD **40** does not receive a SYN segment from ECSC **120**, PAD **40** does not create a state machine for the TCP session.

With reference now to **Figure 7F**, there is illustrated a time-space diagram showing exemplary network access system signaling when excessive TCP retransmissions are detected. As will be appreciated, TCP sessions are normally closed through a proper disconnect, as illustrated in **Figure 7D**. However, in the event of a network or server failure, the TCP session will timeout in the host and a normal disconnect will not occur. Accordingly, some mechanism must be implemented to update ECSC **120** and PAD **40** when the TCP session disconnects.

In the example shown in **Figure 7F**, the route between the customer and the server is disrupted by failure of a network link or node. This failure causes the TCP agent and the client to re-transmit the data until a threshold number of retransmissions is reached. The client's TCP agent then aborts the TCP connection. Subsequently, the inactivity timer for the TCP session in PAD **40** expires. In response to expiration of the inactivity timer, PAD **40** updates state machine **140** of the TCP session to idle state **142** and reports the TCP session timeout error to ECSC **120**. ECSC **120** responds to the report of the timeout error

by deleting the TCP session from its active session table and instructs PAD 40 to stop marking the packets for the TCP session and to delete the configuration for this TCP session. PAD 40 then deletes the state machine for the TCP session.

5 With reference now to **Figure 7G**, there is depicted a time-space diagram illustrating exemplary network access system signaling when a TCP session participant requests an abrupt close to the TCP session. As illustrated, an application, which in this case is the server application, signals an abrupt close by sending a reset (RST) segment. The application can launch the abrupt close for a
10 number of reasons, for example, because the application wishes to abort the connection or because the TCP agent has detected a serious communication problem that cannot be resolved. In response to receipt of the RST segment, PAD 40 resets the TCP state machine 140 for the session to idle state 142 and passes the RST segment to ECSC 120. In response to receipt of the RST segment, ECSC
15 120 deletes the TCP session from its active session table and configures PAD 40 to stop marking packets for this TCP session. PAD 40 then deletes the TCP state machine 140 for the session and forwards the RST segment to the client. The client then closes the TCP session upon receipt of the RST segment.

20 Connectionless Transport Examples Using UDP Reporting Function

With reference now to **Figures 8A-8C**, there are depicted three examples of network access system signaling for connectionless transport protocols. In each example, the Unreliable Datagram Protocol (UDP) is employed.

25 Referring first to **Figure 8A**, there is depicted a time-space diagram of network access system signaling in which UDP is utilized as the transport for voice data of an IP telephony session. In the example illustrated in **Figure 8A**, a customer has ordered guaranteed service for his IP telephony (IPTTEL) calls, but has a client that does not support the use of RSVP to reserve guaranteed service
30 for the IPTTEL calls. Nevertheless, the customer is able to obtain guaranteed service for an IPTTEL call through the exchange of messages detailed below.

The process begins when a customer at the customer site invokes a client application to place an IPTEL call. The client application then obtains an unused UDP port from a pool of available ports assigned for voice data transmission. The client application then starts sending voice data encapsulated by UDP packets over the network as best-efforts traffic. PAD 40, which has been configured to detect a flow of UDP (i.e., Protocol Type (PT)=17) packets within the voice port range, detects the UDP flow and reports it to the IP Telephony Service Controller (IPTELSC) 120 within external processor 42. IPTELSC 120 queries policy server 48 for a policy decision via SPI 56, which in this example employs COPS. By reference to policy database 46, policy server 48 determines that the customer has ordered guaranteed service for his IPTEL calls and returns a policy decision to IPTELSC 120 that instructs IPTELSC 120 to provide guaranteed service for this IPTEL session, as defined by SA, DA, PT=17, SP and DP.

IPTELSC 120 accordingly configures PAD 40 with an inactivity timer for the session and instructs PAD 40 to stop reporting the occurrence of this IPTEL session. IPTELSC 120 also begins to set up a reserved bandwidth route for the IPTEL call since the customer's client application is incapable of doing so. To set up the reserved bandwidth route, IPTELSC 120 sends a RSVP PATH MESSAGE to PAD 40, which forwards the PATH MESSAGE downstream to the receiver. To indicate approval of the reservation, as well as the amount of reserved bandwidth, the receiver sends a RESV message to PAD 40, which forwards the RESV message to IPTELSC 120. A determination is then made whether a reservation of the specified bandwidth is authorized. If IPTELSC 120 has cached sufficient policy information following the previous query of policy server 48, IPTELSC 120 need not query policy server 48 regarding the bandwidth. If, however, insufficient policy information was cached in the policy cache 130 of IPTELSC 120, policy server 48 is again queried whether the specified bandwidth can be reserved. If the specified bandwidth is available for reservation by this customer, IPTELSC 120 initiates signaling via a signaling controller 128 to set up either a SVC or LSP for the IPTEL session. For an ATM core, a bi-directional SVC is set up. Alternatively, for an MPLS core, two unidirectional LSPs are set

up. Another means of providing QoS to this UDP session involves IPTELS 120 instructing marker 82 in PAD 40 to modify the differentiated service (DiffServ) field in the IP header. Once IPTELS 120 receives a connect or confirm message from the network indicating that the QoS path has been established, IPTELS 120 updates PAD 40 to associate the flow of UDP packets with the QoS path. In addition, IPTELS 120 confirms that the QoS path is setup and reserved by passing a confirm message to PAD 40, which passes the confirm message to the receiver. Thereafter, voice data encapsulated in UDP packets are sent from the customer application to the receiver via the QoS path.

As shown in Figure 8B, in the event that the query of policy server 48 results in a policy decision indicating that the customer does not have a QoS requirement for IPTEL calls, IPTELS 120 configures PAD 40 to prevent PAD 40 from reporting the IPTEL call again. In addition, IPTELS 120 sets an inactivity timer for the IPTEL call so that the prevention of call reporting can be deleted when the inactivity timer expires. Because no QoS path is authorized, the voice data encapsulated by UDP packets continues to be transmitted over the network as best-effort traffic.

With reference now to Figure 8C, a time-space diagram is shown that illustrates network access system signaling utilized to tear down a QoS path in response to the expiration of a UDP session inactivity timer. While an UDP session inactivity timer can expire for a number of reasons including failure of a network link or node, in the example illustrated in Figure 8C, the timeout event is caused by the customer application at the customer site concluding a call and ceasing transmission of voice traffic. Sometime later, when the UDP session inactivity timer expires, PAD 40 detects the timeout event and reports it to IPTELS 120. IPTELS 120 responds by initiating appropriate signaling to release the SVC or LSPs for the IPTEL call, and the release is confirmed by a message to IPTELS 120. IPTELS 120 also invokes the pathtear message to explicitly tear down the QoS path for the IPTEL call. As this message is passed from PAD 40 through the network, the pathtear message removes installed RSVP

states along the QoS path. IPTELSC **120** then deletes the IPTEL call from its active session table and configures PAD **40** to delete all configured parameters for the IPTEL call.

5 Application-Level Examples Using SIP Signaling

Referring now to **Figures 9A-9E**, there are illustrated a number of time-space diagrams showing application-level SIP signaling in a network access system in accordance with the present invention. Referring first to **Figure 9A**, an example of SIP call establishment is shown. In the illustrated example, a caller at the customer site issues a SIP INVITE request to the callee in the network, for example, to invite the callee to participate in a multimedia conference call. When PAD **40** detects the invite request by the UDP or TCP port range assigned to SIP, PAD **40** passes the INVITE request to a Conference Call Service Controller (CCSC) **120**. CCSC **120** then queries policy server **48** (e.g., utilizing an LDAP request) regarding whether the requested capability is approved for the customer. Importantly, to reduce the number of message exchanged between CCSC **120** and policy server **48**, CCSC **120** preferably sets a flag in the query to request that policy server **48** dump the policy lookups for the SIP request into policy cache **130** of CCSC **120**. In this manner, CCSC **120** can thereafter make policy decisions by reference to the cached policies and avoid unnecessary queries of policy server **48**.

Assuming that policy server **48** approves the SIP session, policy server **48** sends CCSC **120** a policy decision indicating approval of the SIP session and dumps the policy rules for SIP calling into policy cache **130** of CCSC **120**. In response to receipt of approval of the SIP session, CCSC **120** returns the INVITE message to PAD **40**, which forwards the INVITE request toward the callee.

In response to receipt of the INVITE request, the callee returns a SIP 200 OK message to PAD **40**, thereby indicating acknowledgement of the call without change in the specified SIP capability. Because there is no change in the SIP capability, PAD **40** forwards the SIP 200 OK message directly to the caller and

does not pass the message to CCSC 120. The caller then acknowledges acceptance of the SIP 200 OK message via an ACK request, which PAD 40 passes to CCSC 120 to inform it of successful establishment of the SIP session. CCSC 120 then queries its policy cache 130 to approve the final capability set of the SIP call. CCSC 120 also adds the SIP session into its active session table and configures PAD 40 with an inactivity timer and other parameters to facilitate the SIP call. CCSC 120 then returns the ACK request to PAD 40, which in turns sends the ACK to the callee to complete SIP call establishment.

To obtain better performance, it is desirable to minimize message passing from PAD 40 to CCSC 120 and from CCSC 120 to policy sever 48. As discussed above, caching policy rules at CCSC 120 greatly reduces the number of required policy queries. Message passing from PAD 40 to CCSC 120 is preferably also reduced through implementation of a SIP state machine at PAD 40 that passes SIP messages to CCSC 120 only to establish, terminate, or change the capability set of a SIP session.

With reference now to **Figure 9B**, a time-space diagram is shown that illustrates exemplary network access system signaling for SIP call termination. In a multi-party SIP conference call, each party can only drop himself from the call, and the call is terminated after the last party leaves the call. In contrast, in a two-party SIP call, such as illustrated in **Figure 9B**, either the callee or the caller can terminate the call. As shown in **Figure 9B**, the caller at the customer site initiates call termination by sending a BYE request, which PAD 40 passes to CCSC 120. CCSC 120 responds to the BYE request by deleting the SIP session from its active session table and by cleaning its policy cache 130 of policy rules pertaining to the SIP session. CCSC 120 then configures PAD 40 to prevent PAD 40 from passing subsequent SIP messages from the SIP call to CCSC 120 and to delete the entire configuration for the SIP call. CCSC 120 also sends the BYE request to PAD 40, which forwards the BYE request to the callee. In response to receipt of the BYE request, the callee acknowledges the end of the SIP call by sending a SIP 200 OK message, which PAD 40 forwards to the caller without passing to CCSC 120.

Referring now to **Figure 9C**, there is illustrated a time-space diagram showing exemplary network access system signaling to end a SIP call that has exceeded the allowed duration. In the depicted example, termination of a SIP call is triggered by CCSC 120 detecting that the SIP call has exceeded the allowed duration specified by the session's ExpireTimer. The callee then issues a BYE request to terminate the call. In response to receipt of the BYE request, PAD 40 passes the BYE request to CCSC 120, which CCSC 120 deletes the SIP session from its active session table and removes associated policies from its policy cache 130. CCSC 120 then configures PAD 40 to prevent PAD 40 from passing to CCSC 120 subsequent SIP messages in the SIP call and commands PAD 40 to delete the entire configuration for the SIP call. CCSC 120 then issues a BYE request to PAD 40, which forwards the BYE request to both the caller and the callee. The caller and the callee then acknowledge the end of the SIP session via a SIP 200 OK message.

Figure 9D illustrates a third call termination example in which neither party to a call requests termination, but instead, both parties simply drop the SIP session. In the absence of activity in the SIP session, the inactivity timer in PAD 40 for the SIP call expires. PAD 40 then reports a timeout to CCSC 120, which deletes the SIP session from its active session table and removes associated policies from its policy cache 130. CCSC 120 then commands PAD 40 to delete the entire configuration for the SIP call.

Referring now to **Figure 9E**, there is depicted a time-space diagram showing exemplary network access system signaling during negotiation of SIP call capability requirements between a caller and a callee. As described above with respect to **Figure 9A**, a SIP call is initiated by a customer application at the customer site issuing a SIP INVITE request. This INVITE request is captured by PAD 40 and passed to CCSC 120, which queries policy server 48. Policy server 48 responds with approval of the SIP call and a download of the policy rules for this SIP session (as requested in the policy query). CCSC 120 then returns the

INVITE request to PAD 40, which forwards it to the callee.

However, in contrast to the example illustrated in **Figure 9A**, the callee does not respond with a SIP 200 OK message confirming the SIP call. Instead, the callee responds with a SIP 606 NOT ACCEPTABLE message indicating that the requested call bandwidth is higher than that which can be supported by the access link of the callee and that only a 56 Kbps connection is available. As requested by the INVITE request, the callee response further indicates a set of media encodings, for example, that only PCM (pulse code modulation) or linear predictive coding (LPC) audio can be supported (in that order of preference). In response to receipt of the SIP 606 NOT ACCEPTABLE message, PAD 40 passes the message to CCSC 120, which queries its local policy cache 130 and approves the new capabilities set. CCSC 120 then sends the SIP 606 NOT ACCEPTABLE message back to PAD 40, which passes the message to the caller.

When the caller receives the SIP 606 NOT ACCEPTABLE response, the caller adjusts the call capability requirements and issues another INVITE request specifying a 56 Kbps bandwidth, LPC audio encoding and an ExpireTimer of 120 minutes. As before, the new INVITE request is passed to CCSC 120 by PAD 40. CCSC 120 then queries its local policy cache 130 and limits the call duration to 100 minutes according to resource availability. CCSC 120 then returns the INVITE request with an ExpireTimer of 100 minutes to PAD 40, which sends the INVITE request to the callee.

In response to receipt of this second INVITE request, the callee determines that it is able to support all the call requirements including a call duration of 100 minutes. Accordingly, the callee responds with a SIP 200 OK message having an ExpireTimer set to 100 minutes. In response to receipt of the SIP OK response, PAD 40 sends the response to CCSC 120, which checks the SIP capability set carried in the SIP OK response by reference to its policy cache 130 and approves it. CCSC 120 then sends the SIP OK response to PAD 40, which forwards the SIP OK response to the caller. When the caller receives the SIP OK

response, the caller modifies its ExpireTimer to 100 minutes and acknowledges the SIP OK response via an ACK request. PAD 40 passes the ACK response to CCSC 120, which approves the final SIP capability set carried in the ACK response. Following this approval, CCSC 120 configures PAD 40 with an inactivity timer and other parameters to facilitate the SIP call. CCSC 120 also returns the ACK message to PAD 40, which forwards the ACK message to the callee. Upon receipt of the ACK response by the callee, the SIP call is successfully established.

IP Multicast Examples

As implemented in current networks, IP multicast, that is, the delivery of packets to two or more receivers, employs an “open group” model of communication. According to the open group model, sources need only know a multicast address to which to send packets, but do not need to know the membership of a “group” participating in a multicast session and or to belong to the multicast group to which they are sending multicast packets. Moreover, there is no centralized group management entity with which group members need to register, synchronize, or negotiate, meaning that multicast group members can join or leave a multicast group at will.

Although the current open group model of multicast communication does not permit management or control of multicast communication, management and control of multicast group membership is important to both senders and receivers. For senders, it is important that only authorized sources are available to send packets to a multicast group. For example, content providers often wish to protect their exclusivity as the only source of data to a multicast group and desire to avoid denial-of-service attacks due to flooding by unauthorized sources. It is likewise important for the set of receivers in a multicast group to be controlled to restrict reception of packets to parties authorized by the sources. As an example, sources desire to restrict the receivers capable of receiving video distribution and video conferencing multicast packets. In view of the shortcomings in the conventional IP Multicast open group model outlined above, the network access system

architecture of the present invention implements policy-based multicast service management as illustrated in **Figures 10A-10H**.

Referring first to **Figures 10A-10B**, there are depicted two time-space diagrams showing exemplary network access system signaling to manage registration of new multicast groups in accordance with the present invention. As shown in **Figure 10A**, a host at the customer site signals a desire to join a multicast group (which may be a new multicast group) by sending an Internet Group Multicast Protocol (IGMP) Join-Group Report Message to access router **44** through PAD **40**. Packet header filter **80** of PAD **40**, which is configured to capture IGMP messages by examining protocol type (PT = 2), forwards the Join-Group Report Message to a Multicast Service Controller (MSC) **120** in external processor **42**. In response to receipt of a Join-Group Report Message, MSC **120** queries policy server **48** via SPI **56**, which in this case employs LDAP. Policy server **48** responds to the query by searching policy database **46** to determine if the host's IP address belongs to the eligible membership list for the multicast group.

As shown in **Figure 10B**, if policy server **48** determines that the host is not eligible to join the multicast group, policy server **48** returns a policy decision to MSC **120** rejecting the Join-Group request. MSC **120** responds to rejection of the request by dropping the Join-Group Message that prevents the unauthorized host from registering a new multicast group in access router **44**. MSC **120** may also write the unauthorized attempt into an event log for use in detecting fraud attempts or denial of service attacks.

Alternatively, if policy server **48** approves the host's request to join the specified multicast group, as shown in **Figure 10A**, policy server **48** sends a policy decision indicating approval to MSC **120**, which returns the Join-Group Report Message to PAD **40**. PAD **40** then forwards the Join-Group Report message to access router **44**. If the host is the first member of the multicast group on the network, access router **44** adds the multicast group reported in the Join-

Group Report message to the list of multicast group memberships on the network to which the host is attached.

Referring now to **Figure 10B** and **10C** there are depicted time-space
5 diagram illustrating exemplary network access system signaling that is utilized to manage host membership queries seeking to determine the membership of a multicast group. In the example shown in **Figure 10C**, PAD **40** receives an IGMP Host Membership Query message originating in the network from access router
10 **44**. Packet header filter **80** captures this IGMP message based upon its port number and passes the Host Membership Query message to MSC **120** in external processor **42**. MSC **120** then queries policy server **48** via SPI **56** (which in this example employs LDAP) to ascertain whether the source address of the Host Membership Query Message is an authorized access router **44**.

As shown in **Figure 10B**, if policy server **48** determines by reference to
15 policy database **46** that the Host Membership Query message is from an unidentified or unauthorized source, policy server **48** returns a policy decision to MSC **120** rejecting the Host Membership Query. In response rejection of the Query, MSC **120** drops the Host Membership Query message and writes a
20 warning message into its event log that may indicate a denial-of-service directed toward the network by flooding of unauthorized Host Membership Query messages.

If, on the other hand, policy server **48** approves the Host Membership
25 Query and so indicates to MSC **120**, as shown in **Figure 10C**, the Host Membership Query is returned to PAD **40**, which forwards the Host Membership Query to the hosts in the customer site. Thus, the network access system of the prevent invention supports policy-based management of Host Membership Queries.

30 With reference now to **Figures 10E-10F**, there are depicted time-space diagrams of exemplary network access system signaling utilized to manage

sending of multicast packets to the network. In the examples shown in both of **Figures 10E-10F**, a host at the customer site sends IP multicast packets addressed to a particular multicast group. When PAD **40** receives the first multicast packet, packet header filter **80** captures the packet after checking to determine whether packets having its multicast address had previously been received. PAD **40** then passes the first multicast packet to MSC **120** in external processor **42**. MSC **120** queries policy server **48** via SPI **56** (which in this case employs LDAP) to determine whether the source address of the multicast packet is authorized to send multicast packets to the specified multicast group.

As shown in **Figure 10F**, in response to receipt of a policy decision rejecting the sending of the multicast packet (e.g., because the source sending the multicast packet is unidentified or unauthorized), MSC **120** configures PAD **40** to drop multicast packets for this combination of source and multicast address and writes a warning message into the event log that may indicate a denial-of-service attempt by a particular source flooding multicast packets onto the network. Alternatively, if MSC **120** receives a policy decision from policy server **48** approving the multicast packet as shown in **Figure 10E**, MSC **120** configures PAD **40** to directly forward multicast packets for this combination of source and multicast address to access router **44** and returns the first multicast packet to PAD **40**. PAD **40** then forwards the first multicast packet to access router **44** and forwards all subsequent multicast packets in the flow directly to access router **44** without passing them to MSC **120**. Thus, the network access system of the present invention utilizes policy-based decisions to permit ingress of authorized multicast packets and prevent ingress of unauthorized packets.

With reference now to **Figures 10G-10H**, there are illustrated time-space diagrams of exemplary network access system signaling utilized to manage the receipt of multicast packets from the network. In the example shown in **Figures 10G and 10H**, access router **44** receives IP multicast packets from the network and forwards them to PAD **40**. In response to receipt of the first multicast packet, packet header filter **90** of PAD **40** captures the multicast packet after checking to

determine whether a packet having its multicast address had previously been received. Packet header filter 90 then passes the first multicast packet to MSC 120 in external processor 42, which queries policy server 48 to determine whether the source address of the multicast address is authorized to send multicast packets to the specified multicast group.

As shown in **Figure 10H**, if policy server 48 determines that receipt of multicast packets is unauthorized, for example, because the source of the multicast packets is unidentified or unauthorized, policy server 48 sends MSC 120 a policy decision rejecting receipt of the multicast packet. In response to rejection of receipt of the multicast packet, MSC 120 configures PAD 40 to drop multicast packets for this combination of source and multicast address and writes a warning message into the event log that may indicate unauthorized multicast packets from the specified source address attempting to flood the sub-network in the customer site. As a result, subsequent multicast packets containing the same combination of source and multicast address are dropped by PAD 40.

Alternatively, as shown in **Figure 10G**, if policy server 48 approves receipt of the multicast packet, MSC 120 configures PAD 40 to directly forward subsequent packets containing the same combination of source and multicast address directly to the customer site. MSC 120 also returns the first multicast packet to PAD 40, which forwards the first multicast packet and subsequent multicast packets to the customer site. As illustrated in **Figure 10H**, subsequent multicast packets in the flow are forwarded by PAD 40 directly to the customer site without passing them to MSC 120.

Conclusion

As has been described, the present invention introduces a distributed network access system architecture. The distributed network access system architecture of the present invention replaces a conventional monolithic edge router with a programmable access device containing at least filtering and forwarding functionality, an external processor having one or more service-

specific service controllers that implement policy-based control of the PAD, and an access router that performs basic routing. This distributed architecture has numerous benefits over conventional monolithic router architectures, including scalability, flexibility, extensibility, interoperability, security, and service provisioning.

The network access architecture of the present invention achieves superior scalability as compared to conventional monolithic routers by virtue of the distribution of functionality among three logical modules: a programmable access device, an external processor providing service control, and an access router. In particular, by separating the routing performed by the access router from the functionality implemented by the programmable access device and external processor, additional traffic and services can be handled without overloading the access router simply by adding external processor modules and programmable access devices according to service requirements and customer demand. In addition, as Internet traffic patterns continue to change from locally concentrated to globally distributed, the ability to apply service and policy control at the network access point separately from regional routing provides a more scalable design for forwarding traffic toward distant destinations.

The distributed network access system architecture of the present invention also provides improved flexibility. Such flexibility is a natural outgrowth of the ability of a service provider and/or customer to implement policies that govern the service control and programmability of functional modules of the programmable access device. For example, the packet header filters of the programmable access device can be configured to distinguish packet flows based on any arbitrary combination of SA, DA, TOS/DSCP, PT, SP, and DP, as well as higher-layer protocol information, such as TCP, SIP, and IGMP. In addition, the monitors of the programmable access device can be programmed by the service controllers of the external processor to collect statistics for arbitrary combinations of SA, DA, TOS/DSCP, PT, SP, DP, or other fields and to report on events (e.g., excessive TCP retransmissions and RTP/UDP inactivity) based upon the collected statistics.

One particularly useful application of such monitoring is tracking statistics for different layer-2, layer-3, layer-4 and higher layer traffic types to ensure that active SLAs are maintained throughout the network. This policy-based approach for providing dynamic SLA support in the network is a more flexible solution than the current TDM (Time Division Multiplexing) approach to SLAs.

The advantage of extensibility arises in part because of the service-specific control provided by the service controllers in the external processor. Such service-specific control can be implemented either with dedicated service controllers or with generic controllers that each support service-specific APIs. Regardless of the chosen implementation, new services can be introduced simply by adding new service controllers or modifying existing service controllers. The addition of new services does not require any alteration to the programmable access device, access router, or other service controllers. Thus, other services are not disrupted during service upgrades. Moreover, because the service controllers are independent of the programmable access device and access router, the development of new services and upgrading of existing services is not dependent upon vendors of proprietary hardware, which greatly reduces the time and cost for developing or upgrading services.

The extensibility of the present invention is also attributable to the additional monitoring functions that may be implemented in the programmable access device, for example, to verify conformance to standards, debug code, and assist fault diagnosis by saving and reporting memory dumps and other related information to the service controllers. Such capability is not integrated into conventional switches or routers and is usually achieved only by the addition of external network monitoring devices. The enhanced usage monitoring provided by the present invention enables a service provider to sell network resources (i.e., capacity) dynamically while still conforming to SLAs. This not only improves network utilization, but also automates traffic engineering, which reduces network management expenses.

As noted above, the distributed network access system of the present invention distributes network access functionality among a programmable access device, an external processor providing service control, and an access router. Because these different components communicate via well-defined interfaces, interoperability is not dependent upon all the hardware or software components being developed by the same vendor.

The present invention also provides enhanced security against theft of services and network attacks. For example, the external processor may be maintained in a secure environment while leaving the forwarding functions of the programmable access device in a less-secure environment. In addition, security software and/or hardware can easily be integrated into the external processor so that sessions to configure the programmable access device from IP addresses other than its master external processors (as well as other unauthorized communication) are denied by the packet header filter of the programmable access device without being passed into the network.

The present invention also has enhanced service provisioning. Since the programmable access device intercepts network, transport and application level messages, thereby enabling the identification of applications and users, the network access system of the present invention can establish appropriate priorities for or provide desired bandwidth to data flows of user applications. For example, by employing RSVP and a LAN subnet bandwidth manager (SBM), a customer application can be provided with guaranteed bandwidth and priority end-to-end across local and wide area networks. Importantly, the policies that enable customer applications to reserve bandwidth, perform admission control, and prioritize traffic streams based upon available network capacity can be determined not only by the service provider but also by customers. Thus, customer applications can interact with service provider network resources to dynamically provision services and provide applications with a guaranteed quality of service. This network-based provisioning invoked by policy control replaces time-consuming and error-prone OSS (Operation and Support System) provisioning,

thereby reducing the intensity and the cost of the network provisioning for IP-centric customer applications.

Even with the above advantages, the distributed network access system architecture of the present invention can provide a cost-effective network solution. Currently, the trend is for service providers to push more “intelligent” and therefore more expensive devices to the edge of their network designs. However, this design requires customers to purchase intelligent and therefore expensive CPEs (Customer Premises Equipment). In contrast, the distributed network access system architecture of the present invention supports relatively inexpensive PADs, which enables customers to purchase sufficient intelligence to provide service delivery without undue expense.

While the invention has been particularly shown and described with reference to a preferred embodiment, it will be understood by those skilled in the art that various changes in form and detail may be made therein without departing from the spirit and scope of the invention. For example, although aspects of the present invention have been described with respect to a computer system executing software that directs the functions of the present invention, it should be understood that present invention may alternatively be implemented as a program product for use with a data processing system. Programs defining the functions of the present invention can be delivered to a data processing system via a variety of signal-bearing media, which include, without limitation, non-rewritable storage media (e.g., CD-ROM), rewritable storage media (e.g., a floppy diskette or hard disk drive), and communication media, such as digital and analog networks. It should be understood, therefore, that such signal-bearing media, when carrying or encoding computer readable instructions that direct the functions of the present invention, represent alternative embodiments of the present invention.

CLAIMS

What is claimed is:

1. An external processor for a network access system having a programmable access device, said external processor comprising:
 - a service controller that provides at least one service for network traffic;
 - a message processor that processes network messages for service processing by the service controller; and
 - a programmable access device controller that programs an associated programmable access device in response to service controller processing.
2. The external processor of Claim 1, wherein the external processor includes a plurality of service controllers including said first service controller, wherein each of said plurality of service controllers implements a respective one of a plurality of services.
3. The external processor of Claim 2, wherein the plurality of service controllers includes primary and secondary service controllers for a particular service among said plurality of services, and wherein the secondary service controller provides said particular service to said programmable access device if said primary service controller fails.
4. The external processor of Claim 2, wherein said plurality of service controllers includes a second service controller in communication with said first service controller such that a network message can be serviced by both of said first service

4 controller and said second service controller.

1 5. The external processor of Claim 2, wherein the external processor is coupled
2 to a plurality of programmable access device, and wherein at least one of the plurality
3 of service controllers performs service processing for less than all of said plurality of
4 programmable access devices.

1 6. The external processor of Claim 1, wherein the service controller includes
2 means for injecting a packet into a traffic flow handled by the programmable access
3 device.

1 7. The external processor of Claim 1, wherein the service controller supports a
2 service policy interface through which the service controller requests policy decisions
3 from a policy server.

1 8. The external processor of Claim 1, wherein the external processor includes a
2 policy cache that selectively caches policies obtained from the policy server.

1 9. The external processor of Claim 1, and further comprising a reporting
2 processor that provides an interface through which a reporting event received from the
3 programmable access device is communicated to the service controller.

1 10. The external processor of Claim 1, and further comprising a signaling
2 controller that transmits signals to configure network hardware to provide network
3 connections.

1 11. The external processor of Claim 10, wherein the signals specify a quality of
2 service.

1 12. The external processor of Claim 1, wherein the service controller comprises
2 session management means for causing the programmable access device controller to
3 signal the programmable access device to end a session receiving enhanced service.

1 13. The external processor of Claim 12, wherein the session receiving enhanced
2 service is a Transport Control Protocol (TCP) session, and wherein the session
3 management means comprises means for causing the programmable access device
4 controller to signal the programmable access device to delete the TCP session state in
5 response to a session activity level.

1 14. The external processor of Claim 1, wherein the service controller comprises a
2 conference call service controller.

1 15. The external processor of Claim 1, wherein the service controller comprises an
2 e-commerce service controller.

1 16. The external processor of Claim 1, wherein the service controller comprises an
2 internet protocol telephony service controller.

1 17. The external processor of Claim 1, wherein the service controller comprises a
2 reserved bandwidth service controller.

1 18. The external processor of Claim 1, wherein the service controller comprises a
2 multicast service controller.

1 19. A method of providing service to selected messages with an external processor
2 in a network access system having a programmable access device, said method
3 comprising:

4
5 receiving a network message at the external processor from the programmable
6 access device;

7
8 performing service processing in response to the network message with a
9 service controller of the external processor; and

10
11 programming the programmable access device in accordance with the service
12 processing.

1 20. The method of Claim 19, wherein performing service processing comprises
2 performing each of a plurality of services in response to network messages with a
3 respective one of a plurality of service controllers.

1 21. The method of Claim 20, wherein the plurality of service controllers includes
2 primary and secondary service controllers for a particular service among said plurality
3 of services, and wherein the method further comprises:

4
5 in response to failure of communication with said primary service controller
6 for said particular service, performing service processing utilizing the secondary
7 service controller.

1 22. The method of Claim 20, wherein performing service processing comprises
2 performing a plurality of services in response to a single network message utilizing a
3 plurality of service controllers.

1 23. The method of Claim 20, wherein the external processor is coupled to a
2 plurality of programmable access device, and wherein the method further comprises:

3
4 with at least one of the plurality of service controllers, performing service
5 processing for less than all of said plurality of programmable access devices.

1 24. The method of Claim 19, wherein performing service processing includes
2 injecting a packet into a traffic flow handled by the programmable access device.

1 25. The method of Claim 19, wherein performing service processing comprises
2 requesting a policy decision from a policy server.

1 26. The method of Claim 25, and further comprising selectively caching, in a
2 policy cache of the external processor, policies obtained from the policy server.

1 27. The method of Claim 19, and further comprising:
2
3 receiving a reporting message from the programmable access device; and
4
5 performing service processing with the service controller in response to the
6 reporting message.

1 28. The method of Claim 19, and further comprising signaling network hardware
2 from the external processor to provide a network connection.

1 29. The method of Claim 28, wherein signaling network hardware comprises
2 specifying a quality of service for the network connection.

1 30. The method of Claim 19, wherein performing service processing comprises
2 signaling the programmable access device to end a session receiving enhanced
3 service.

1 31. The method of Claim 30, wherein the session receiving enhanced service is a
2 Transport Control Protocol (TCP) session, and wherein signaling the programmable
3 access device to end a session receiving enhanced service comprises signaling the
4 programmable access device to delete the TCP session in response to a session
5 activity level.

1 32. The method of Claim 19, wherein performing service processing comprises
2 performing conference call service processing.

1 33. The method of Claim 19, wherein performing service processing comprises
2 performing e-commerce service processing.

1 34. The method of Claim 19, wherein performing service processing comprises
2 performing internet protocol telephony service processing.

1 35. The method of Claim 19, wherein performing service processing comprises
2 performing reserved bandwidth service processing.

1 36. The method of Claim 19, wherein performing service processing comprises
2 performing multicast service processing.

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194
2195
2196
2197
2198
2199
2200
2201
2202
2203
2204
2205
2206
2207
2208
2209
2210
2211
2212
2213
2214

ABSTRACT OF THE DISCLOSURE
EXTERNAL PROCESSOR FOR A DISTRIBUTED
NETWORK ACCESS SYSTEM

5 An external processor for a network access system having a
programmable access device includes a service controller that provides at least one
service for network traffic, a message processor that processes network messages
for service processing by the service controller, and a programmable access device
controller that programs the programmable access device in response to service
10 controller processing. It is advantageous for the external processor to include
primary and secondary service controllers for a particular service so that, if the
primary service controller fails, the secondary service controller can provide the
particular service for message received from the programmable access device. In
preferred embodiments, the service controller further includes a reporting
15 processor that provides an interface through which reporting messages received
from the programmable access device can be communicated to the service
controller and a signaling controller that transmits signals to configure network
hardware to establish requested network connections. The external processor
preferably further supports a service policy interface through which the service
20 controller can request policy decisions from a possibly remote policy server.

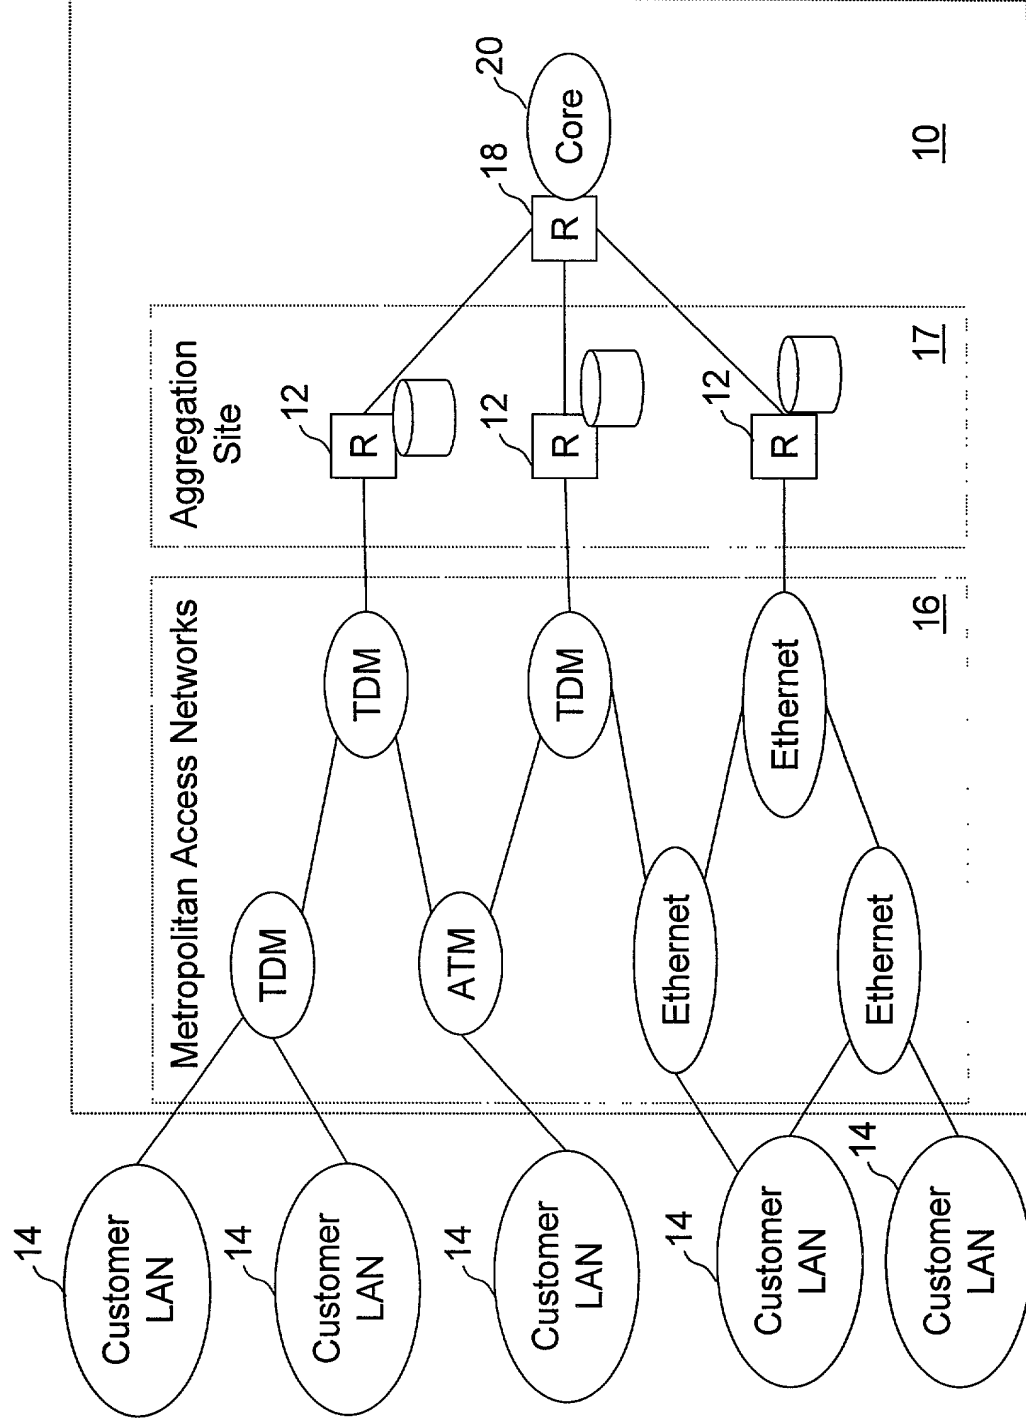


Figure 1A

Prior Art

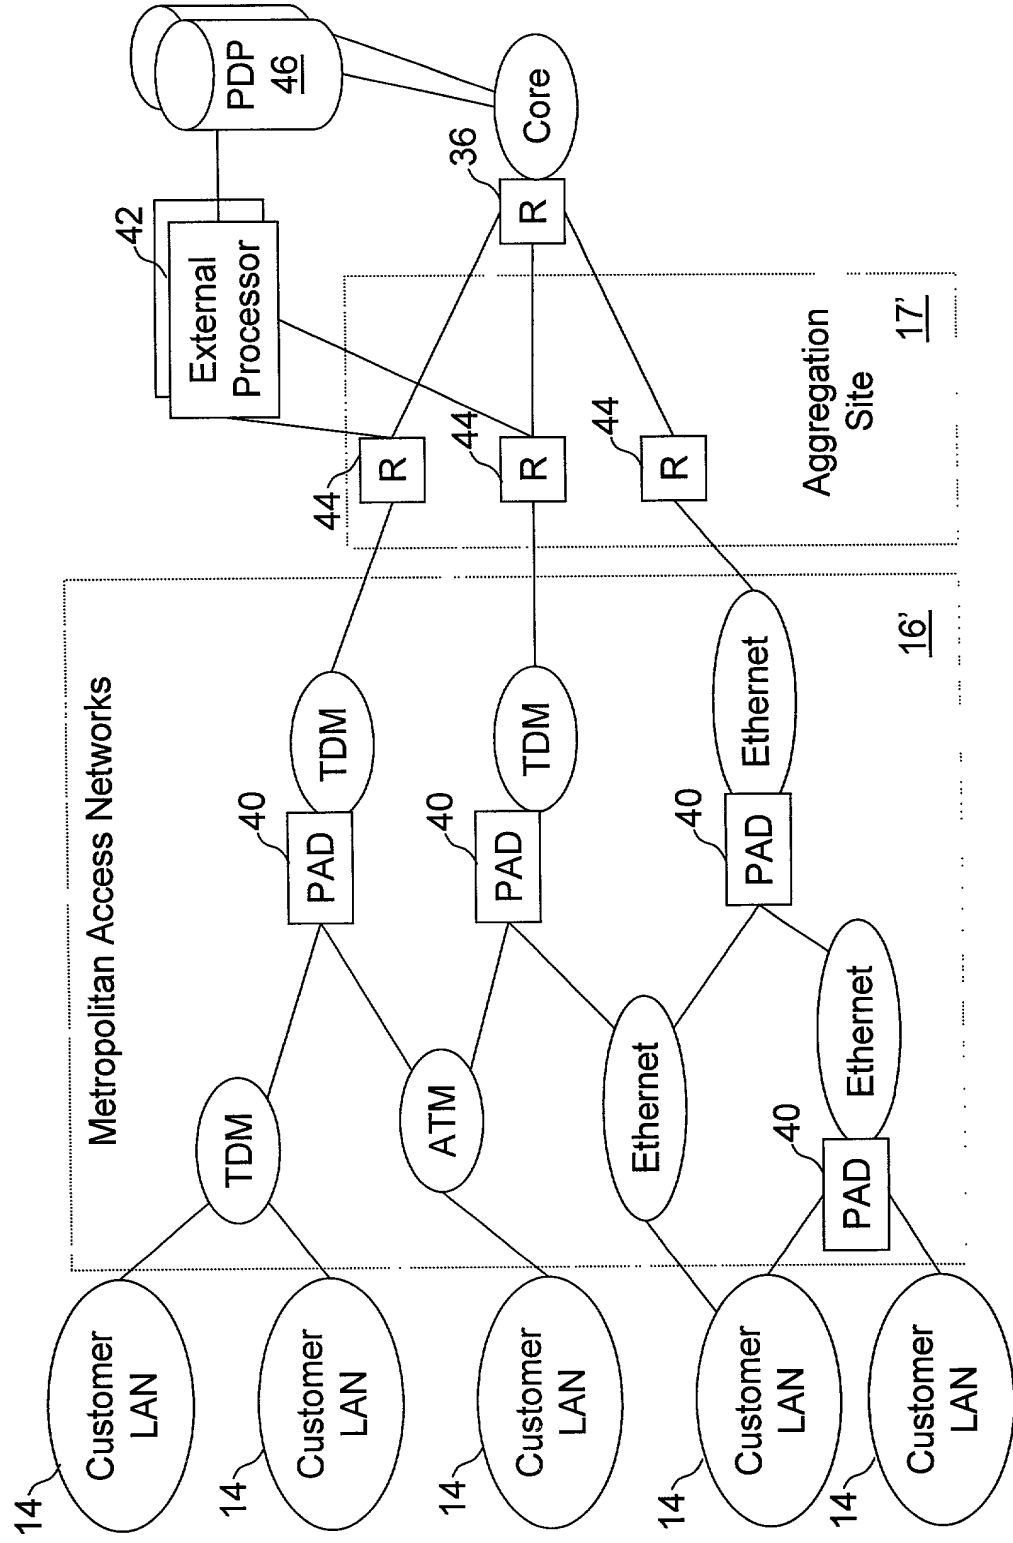


Figure 1B

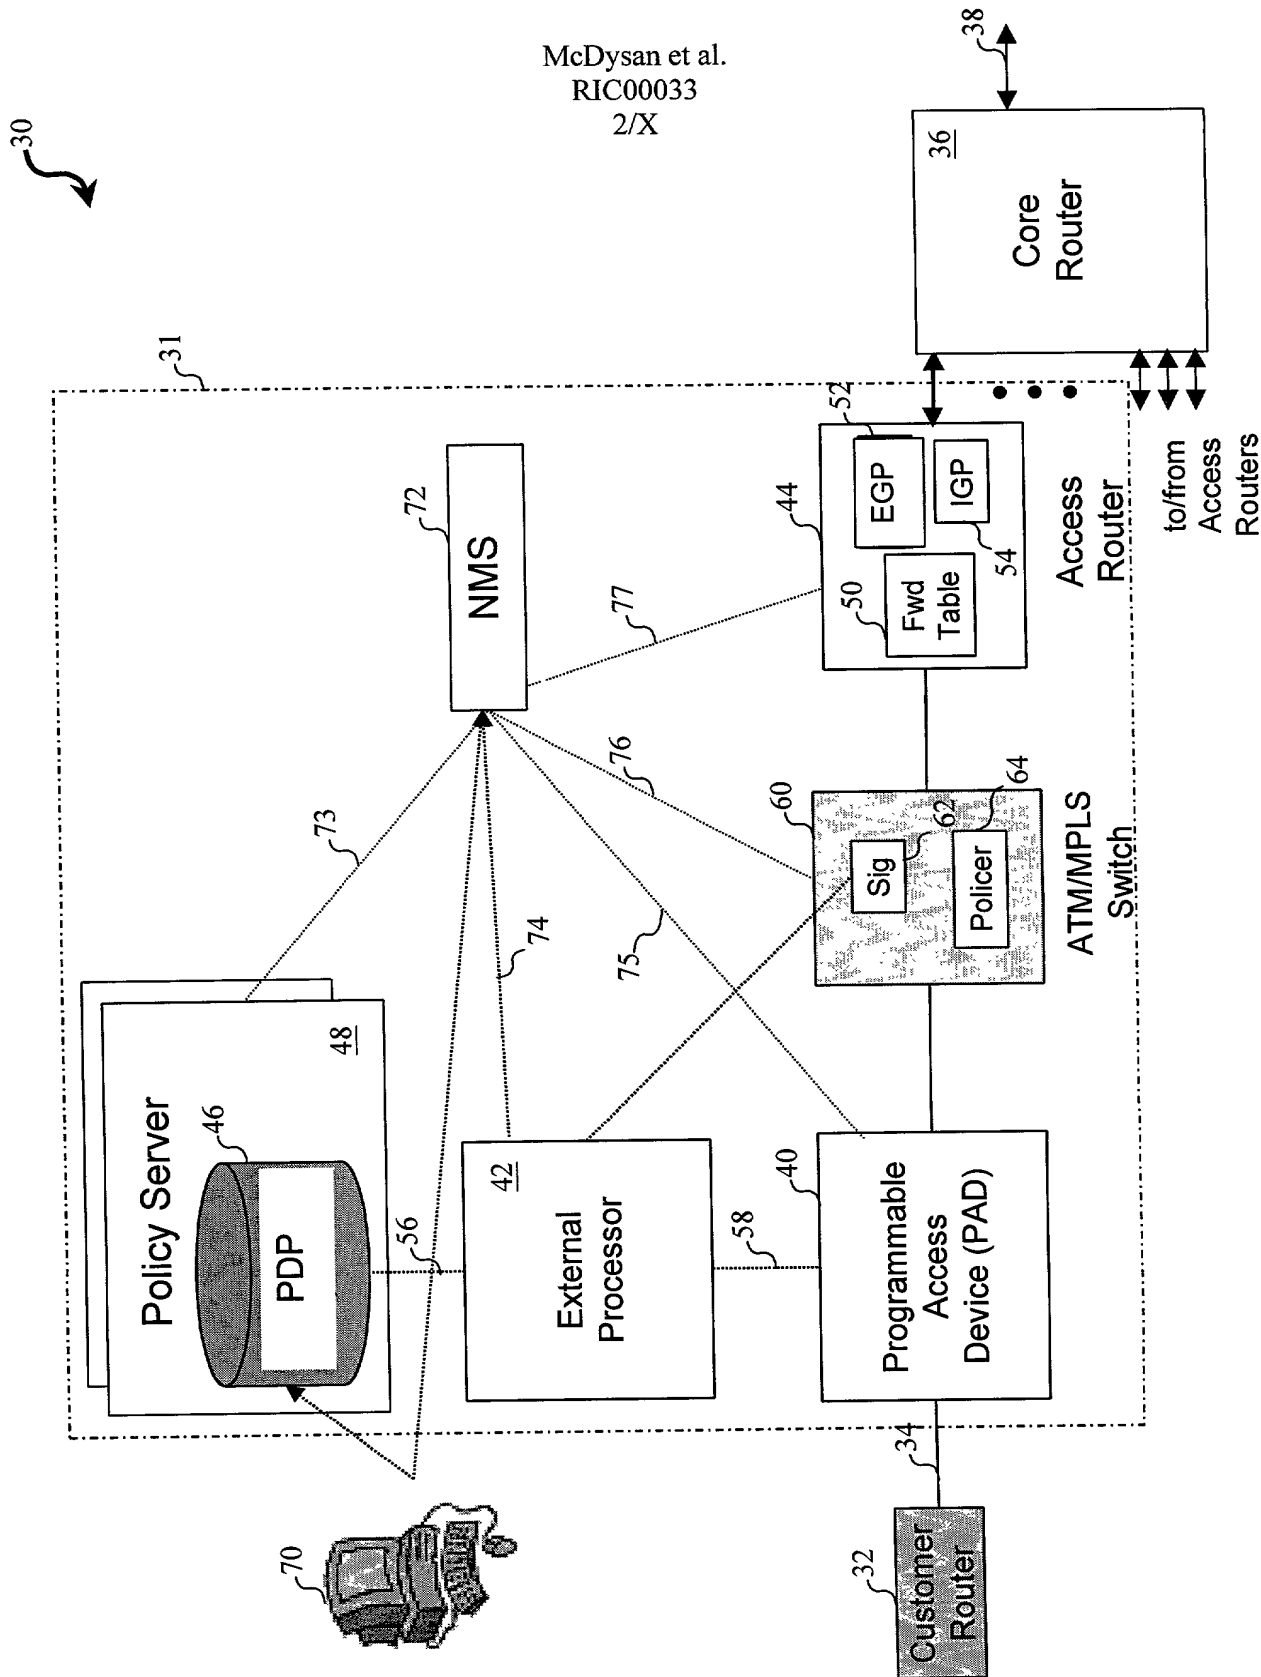


Fig. 2

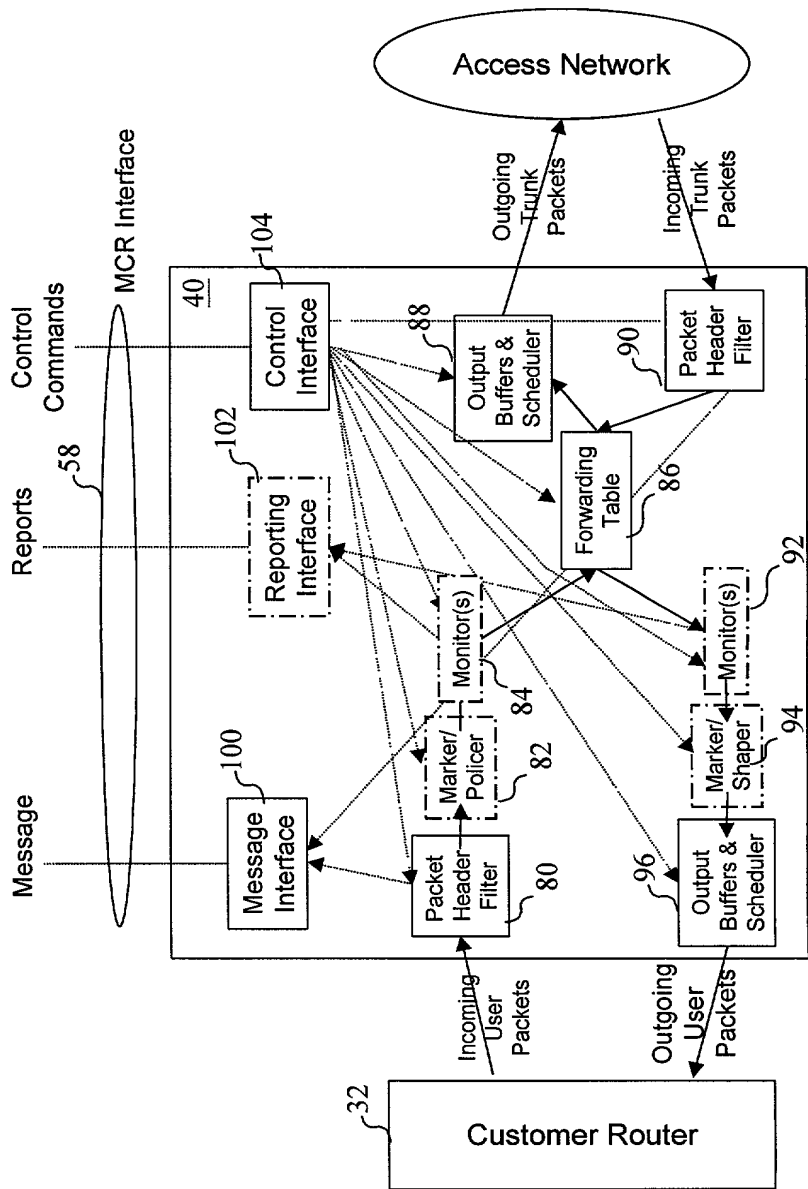


Fig. 3



Fig. 4

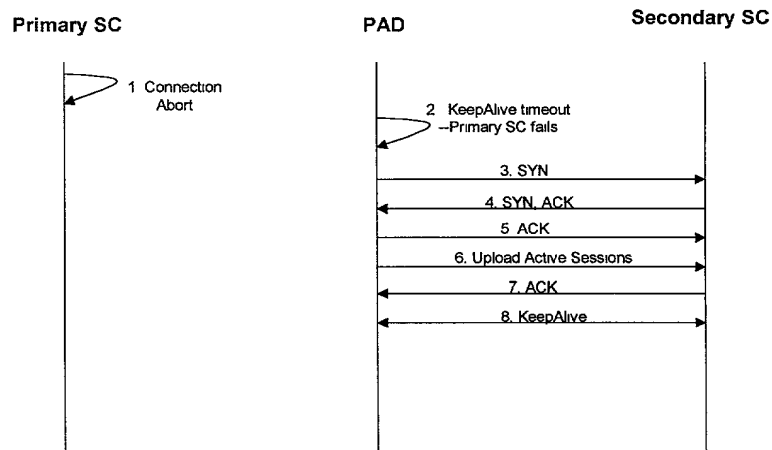


Fig. 5A

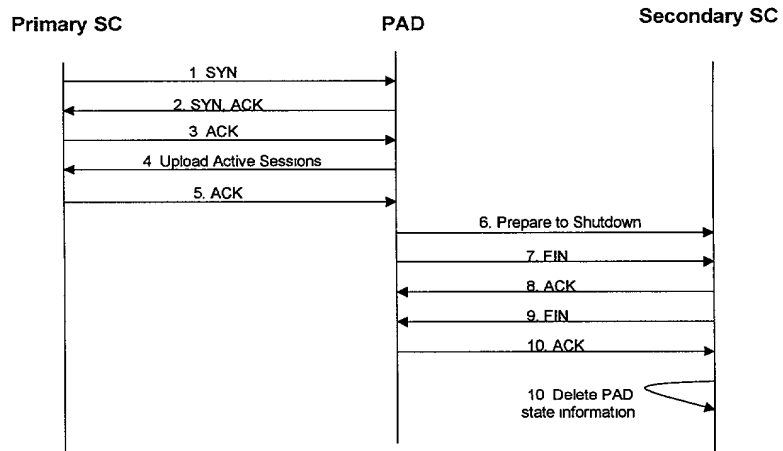


Fig. 5B

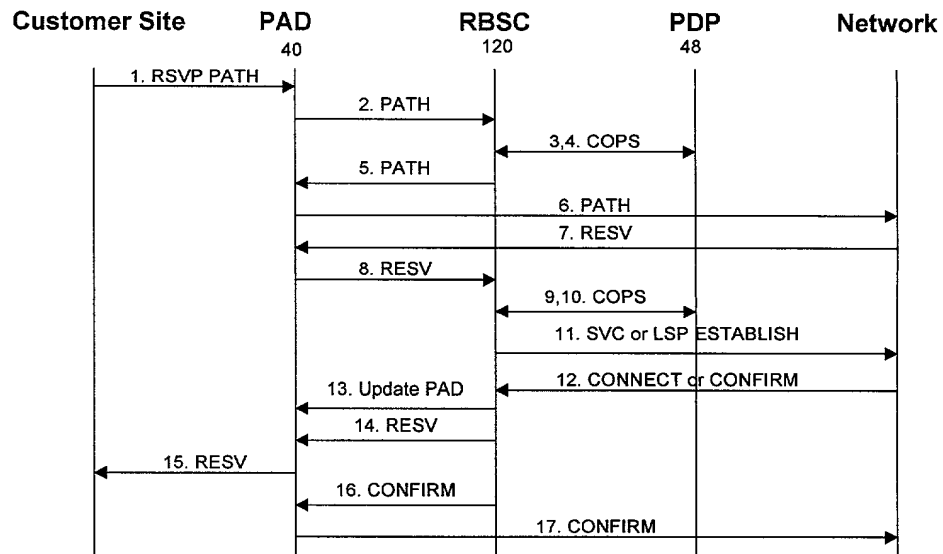
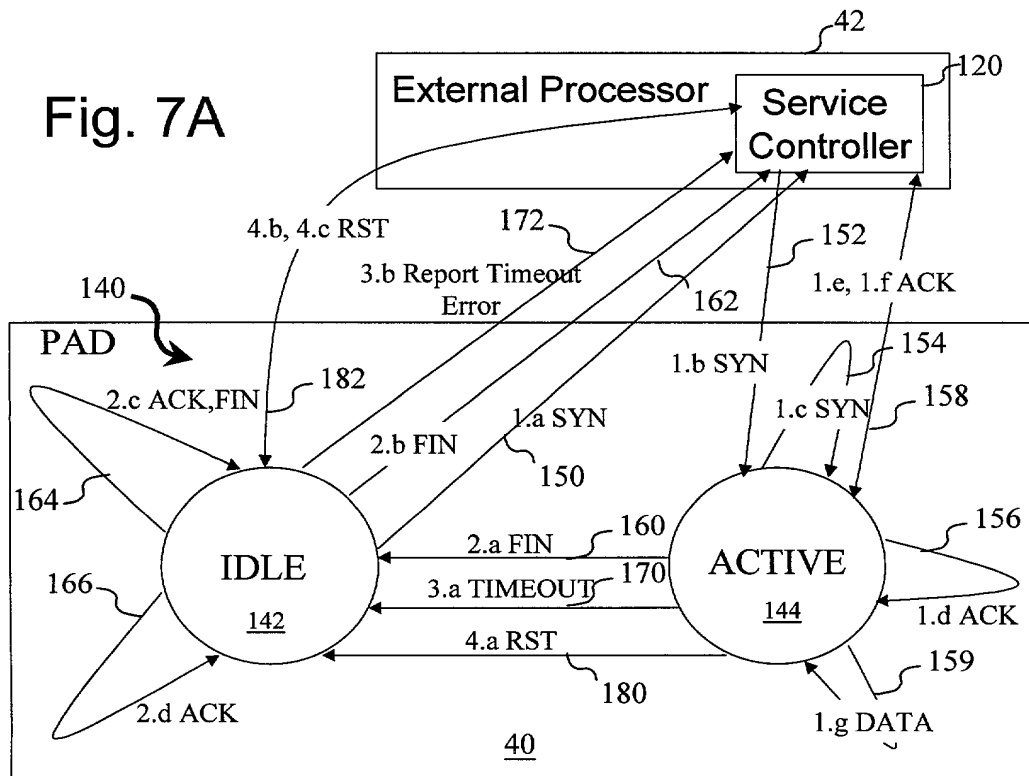


Fig. 6



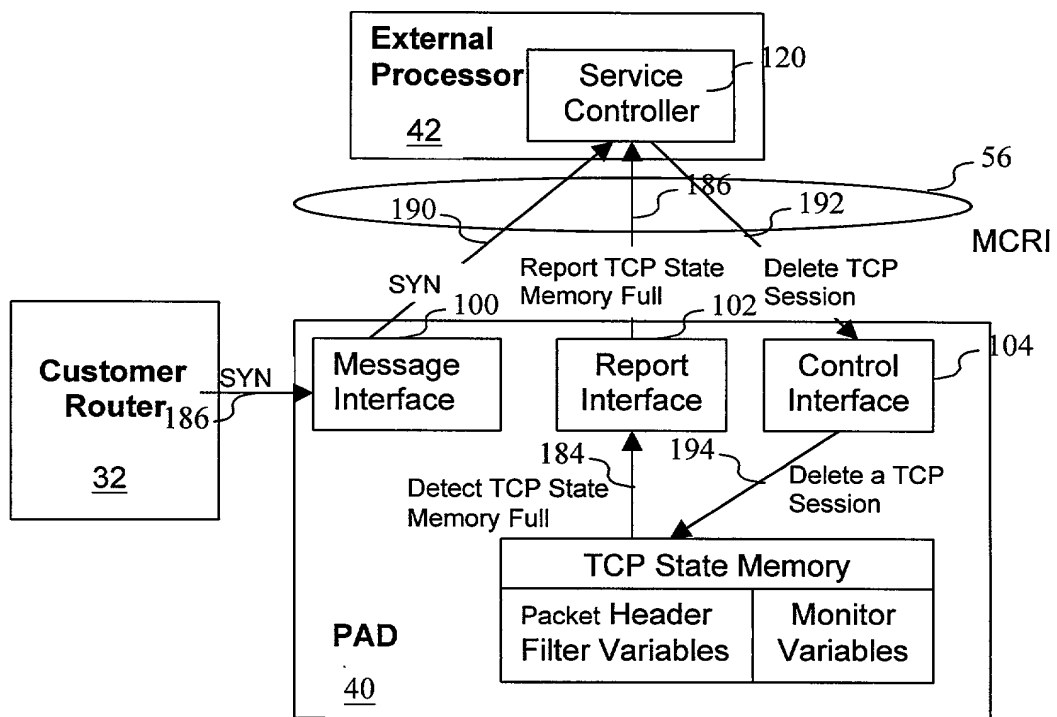


Fig. 7B

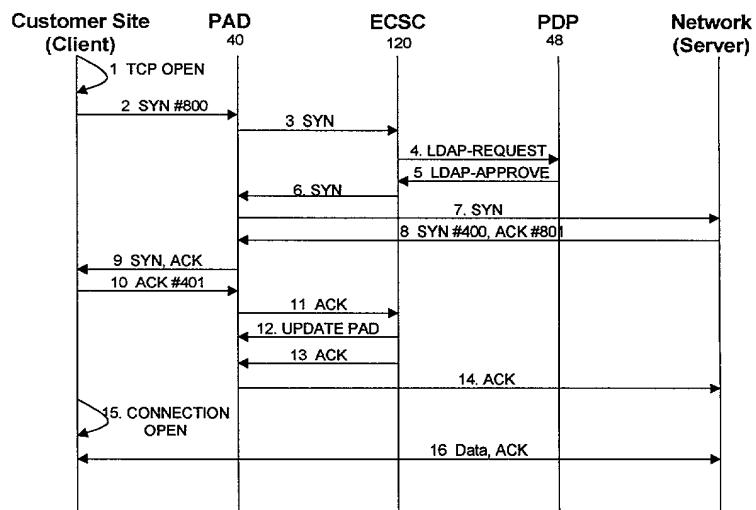


Fig. 7C

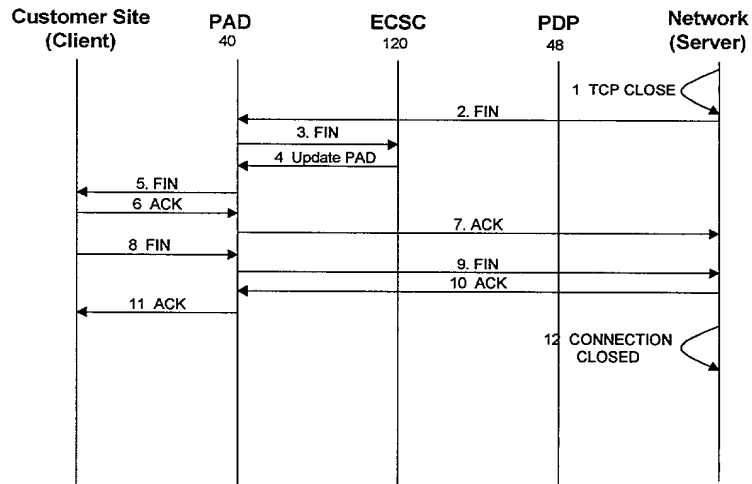


Fig. 7D

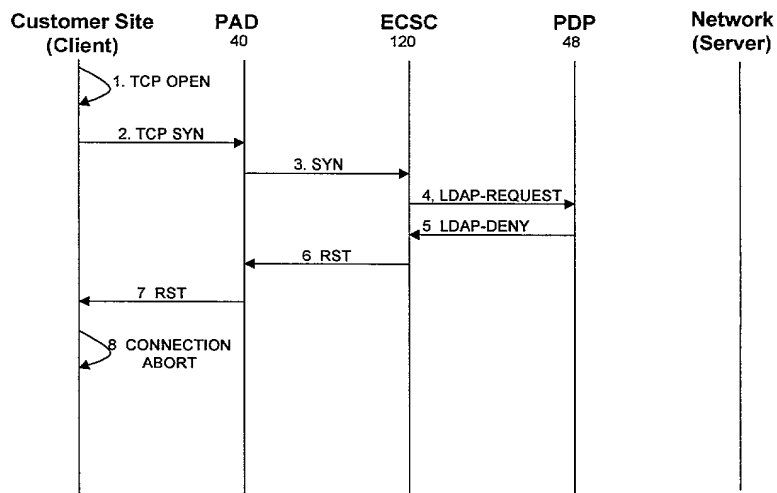


Fig. 7E

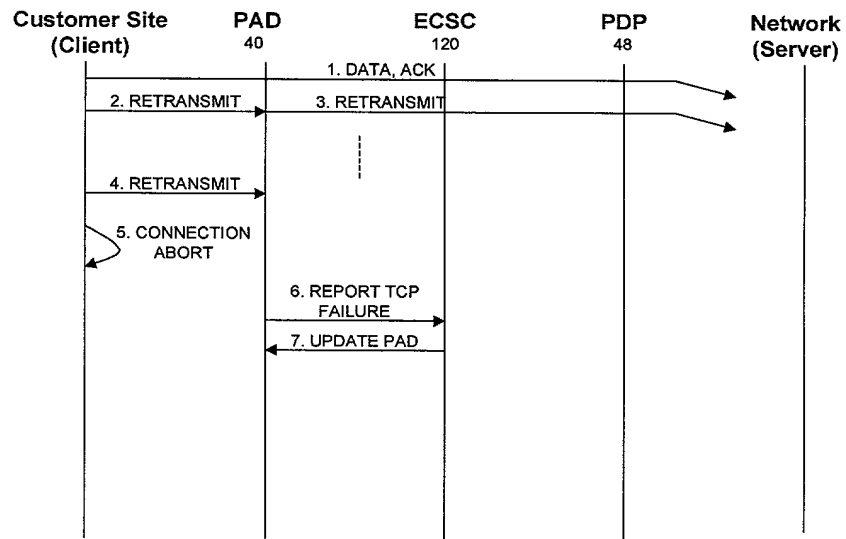


Fig. 7F

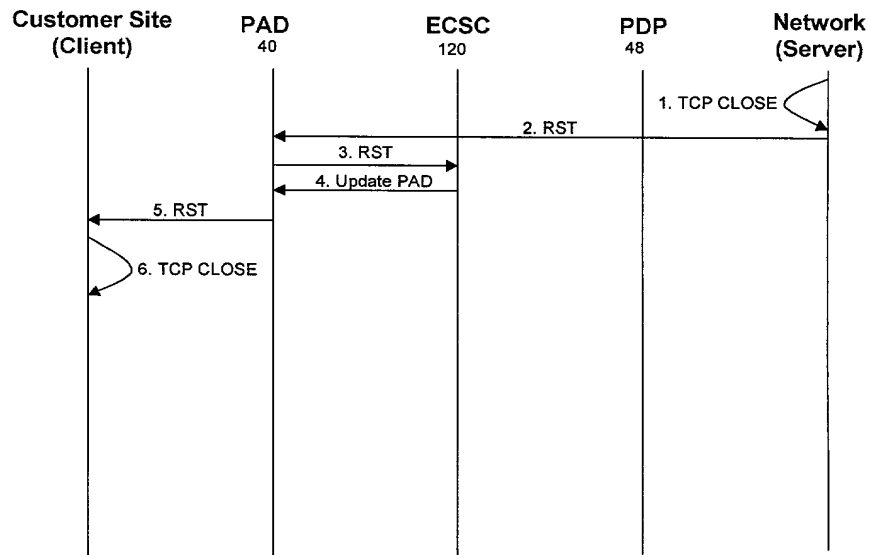


Fig. 7G

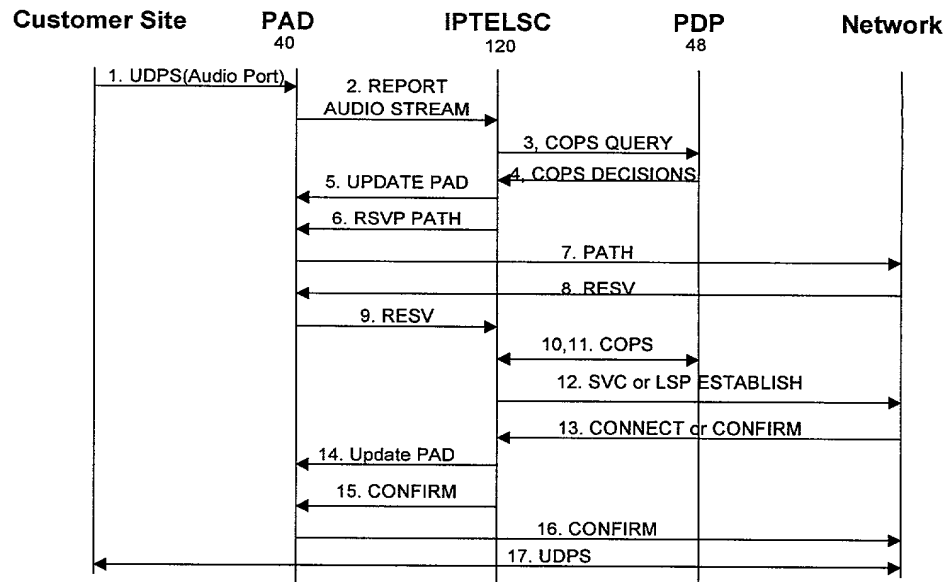


Fig. 8A

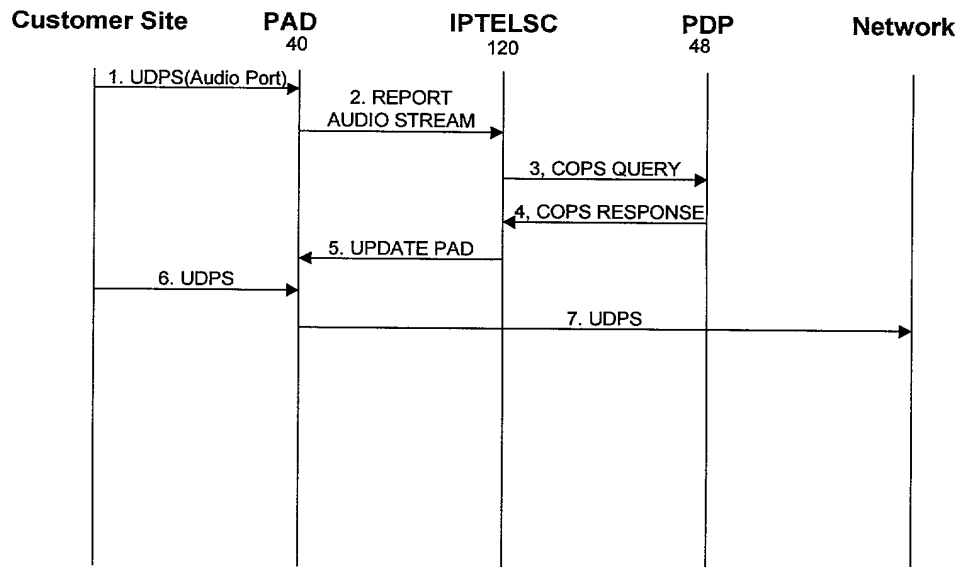


Fig. 8B

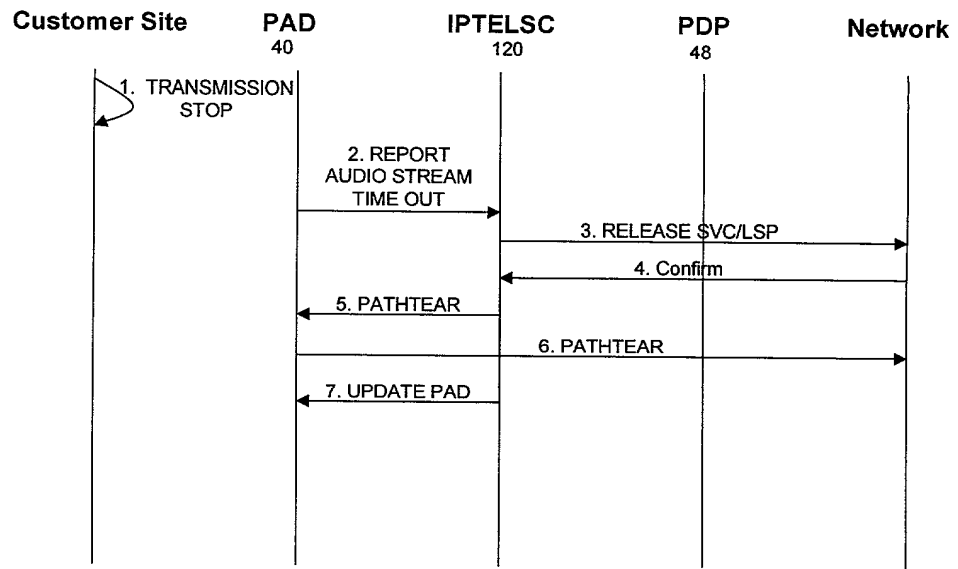


Fig. 8C

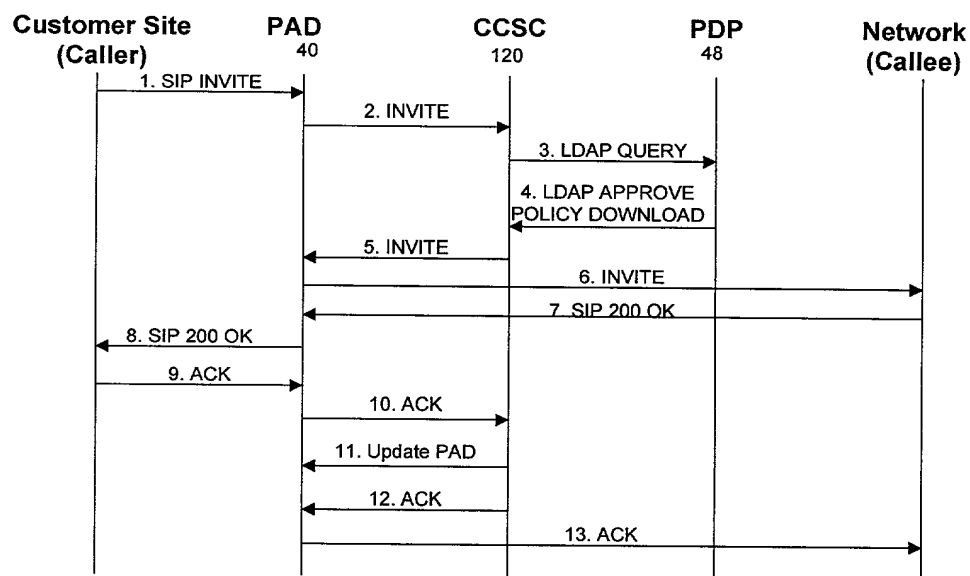


Fig. 9A

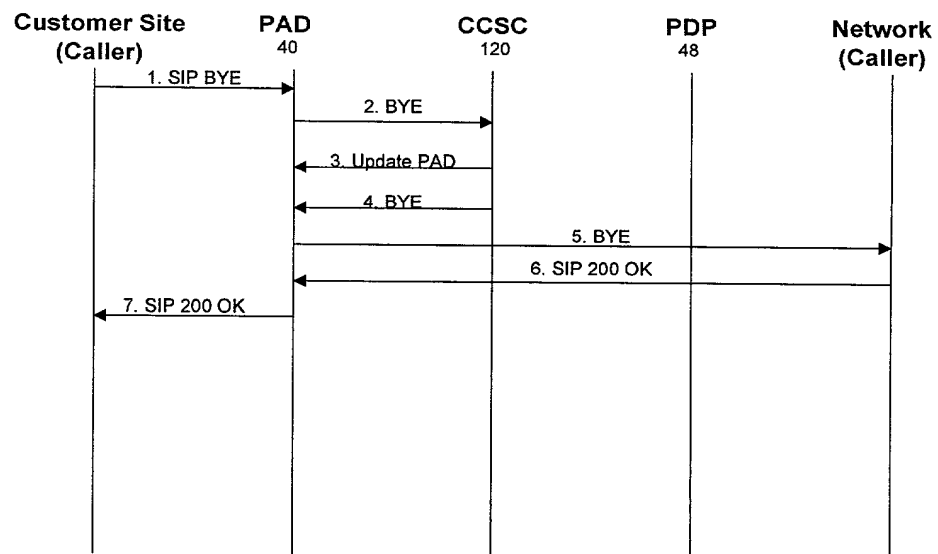


Fig. 9B

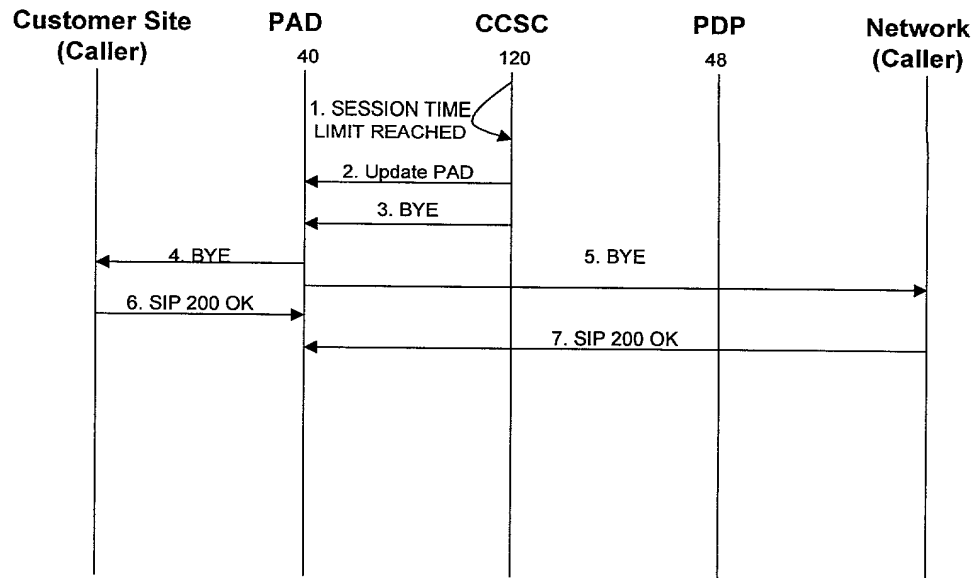


Fig. 9C

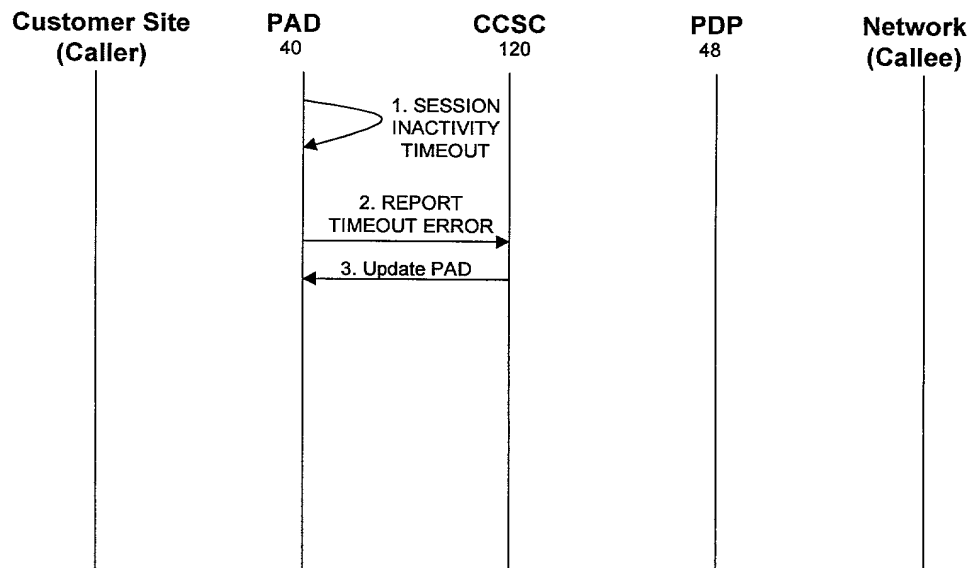


Fig. 9D

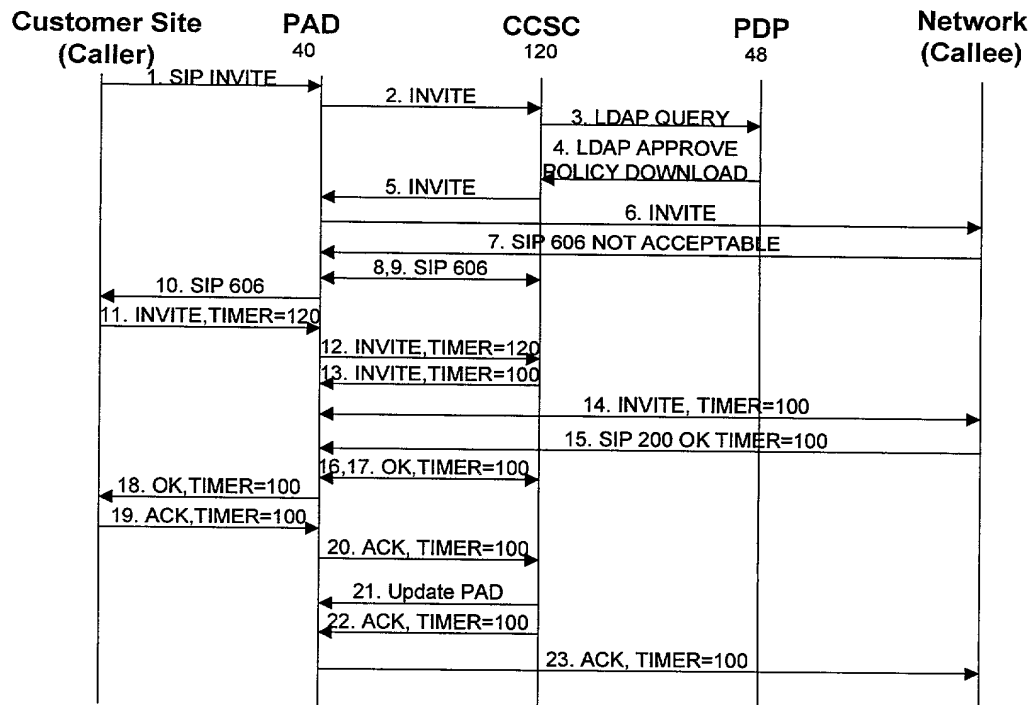


Fig. 9E

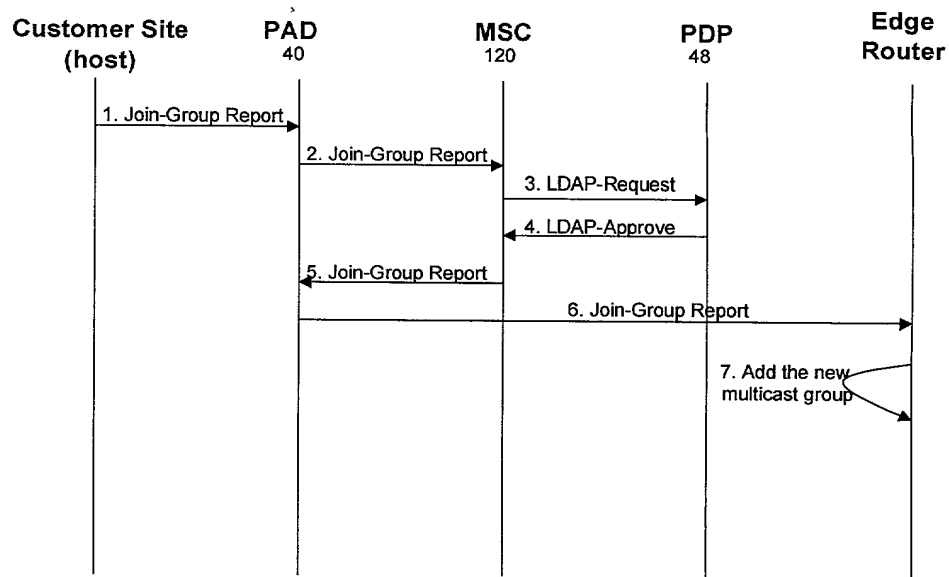


Fig. 10A

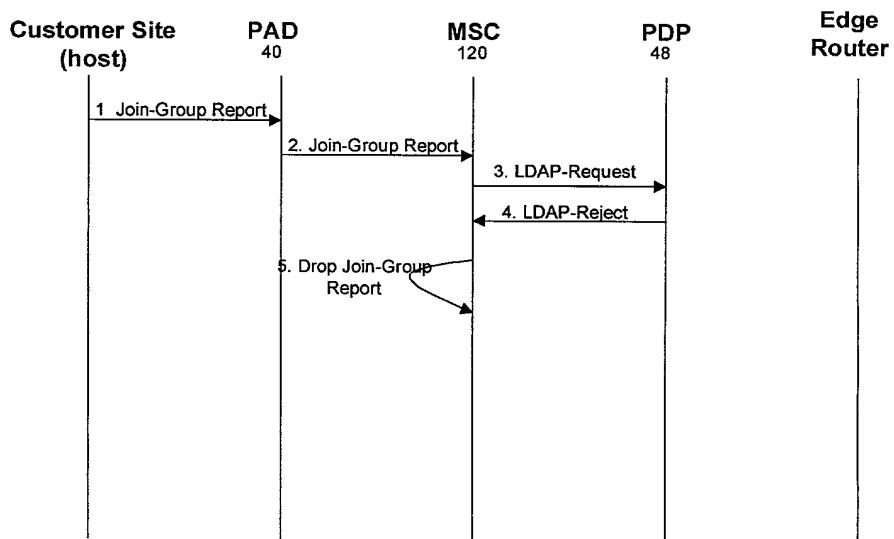


Fig. 10B

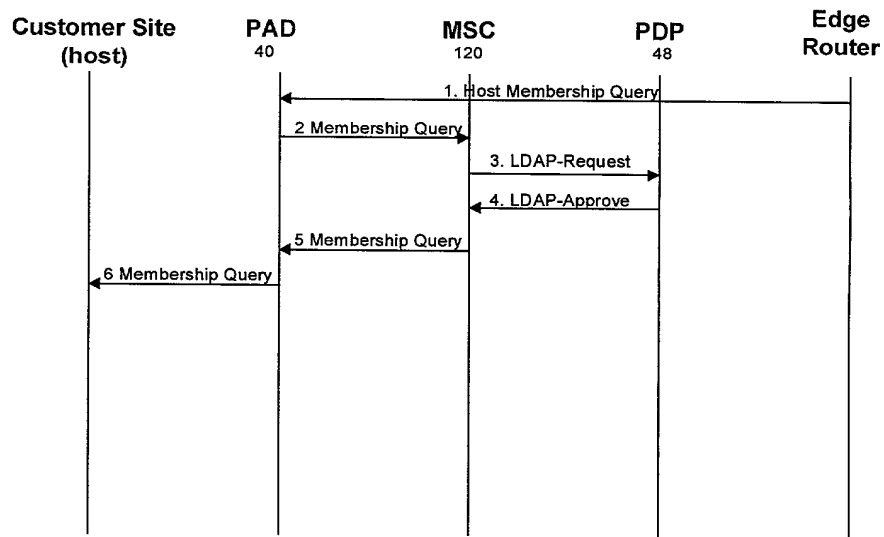


Fig. 10C

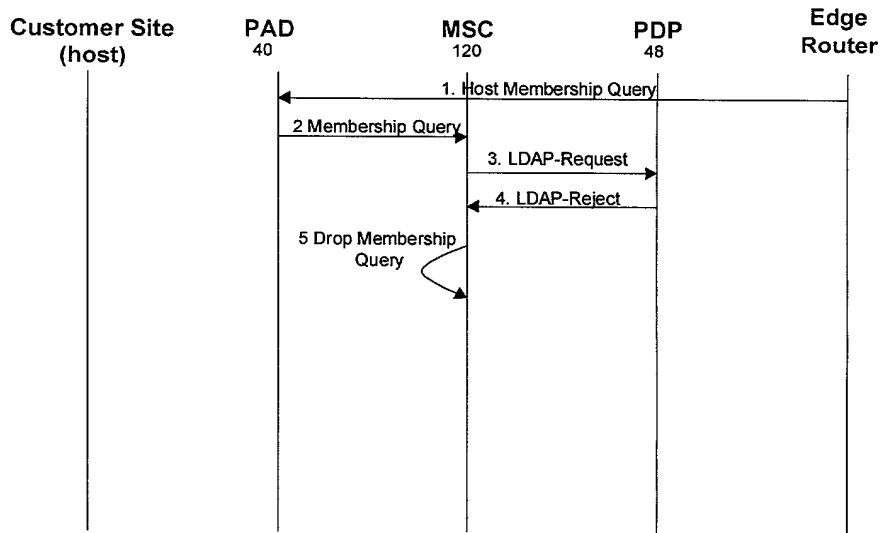


Fig. 10D

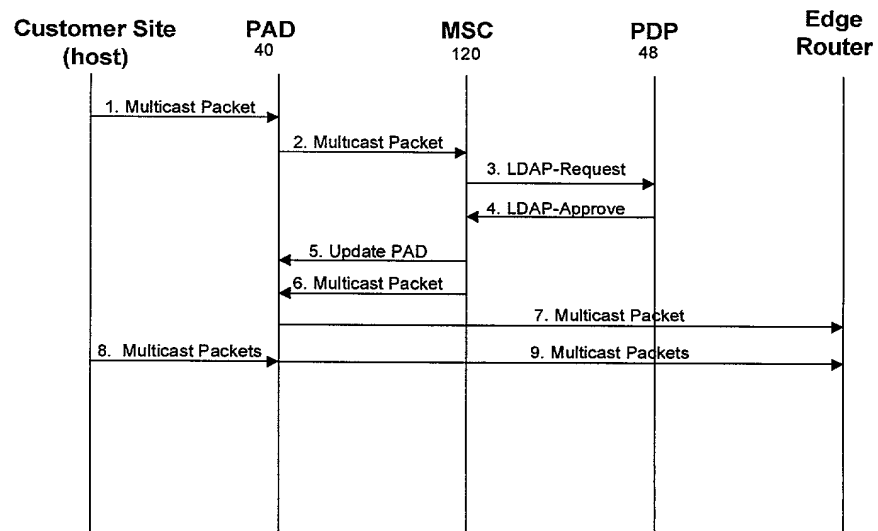


Fig. 10E

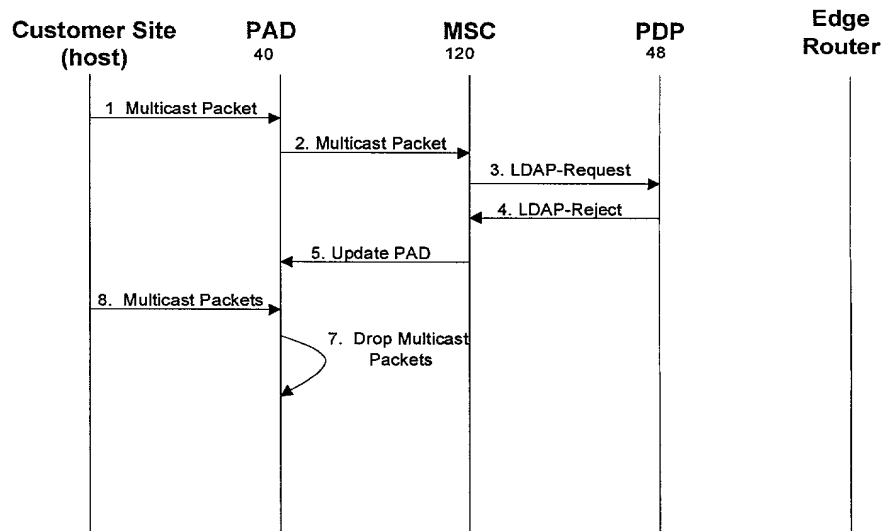


Fig. 10F

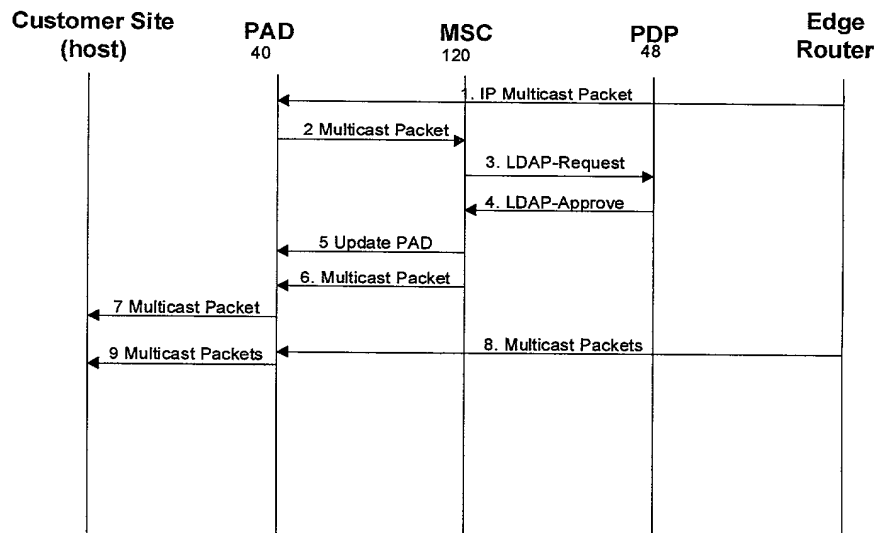


Fig. 10G

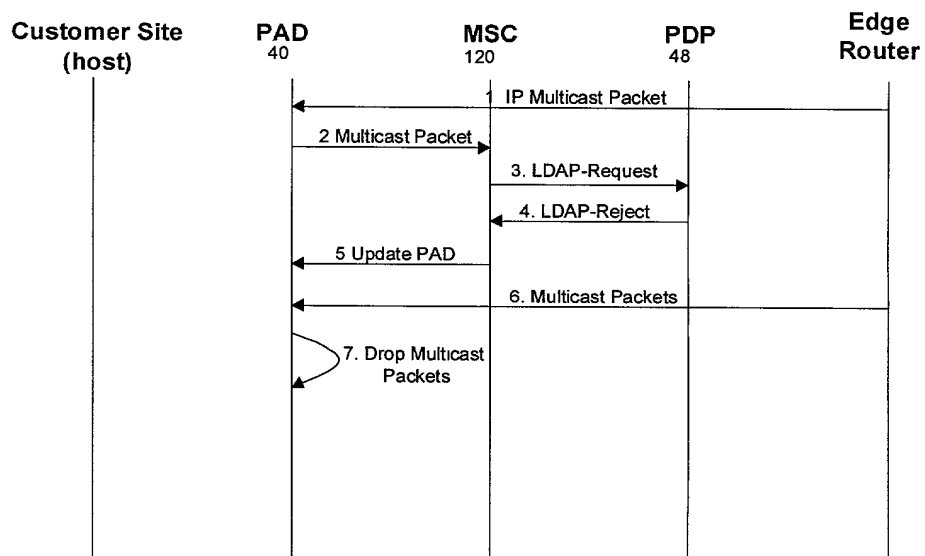


Fig. 10H

**DECLARATION AND POWER OF ATTORNEY FOR
PATENT APPLICATION**

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name;

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

EXTERNAL PROCESSOR FOR A DISTRIBUTED NETWORK ACCESS SYSTEM

the specification of which (check one)

X is attached hereto.

___ was filed on _____
as Application Serial No. _____
and was amended on _____
(if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the patentability of this application in accordance with Title 37, Code of Federal Regulations, §1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s): Priority Claimed

(Number) (Country) (Day/Month/Year) ___ Yes ___ No

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose information material to the patentability of this application as defined in Title 37, Code of Federal Regulations, §1.56 which occurred between the filing date of the prior

application and the national or PCT international filing date of this application:

(Application Serial #)	(Filing Date)	(Status)
------------------------	---------------	----------

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorneys and/or agents to prosecute this application and transact all business in the Patent and Trademark Office connected therewith.

Andrew J. Dillon, Reg. No. 29,634; Daniel E. Venglarik, Reg. No. 39,409; Jack V. Musgrove, Reg. No. 31,986; Brian F. Russell, Reg. No. 40,796; Matthew W. Baca, Reg. No. 42,277; Antony P. Ng, Reg. No. 43,427; Michael R. Barre, Reg. No. 44,023; Andrew Mitchell Harris, Reg. No. 42,638; Richard McCain, Reg. No. 43,785; and Michael Noe, Jr., Reg. No. 44,975.

Send correspondence to: Andrew J. Dillon, FELSMAN, BRADLEY, VADEN, GUNTER & DILLON, LLP, Suite 350 Lakewood on the Park, 7600B North Capital of Texas Highway, Austin, Texas 78731, and direct all telephone calls to Andrew J. Dillon, (512) 343-6116.

FULL NAME OF SOLE OR FIRST INVENTOR: Dave McDysan

INVENTORS SIGNATURE: _____ DATE: _____

RESIDENCE: 2159 Astoria Circle, #104
Herndon, Virginia 20170

CITIZENSHIP: U.S.A.

POST OFFICE ADDRESS: 2159 Astoria Circle, #104
Herndon, Virginia 20170

DOCKET NUMBER: RIC00043

FULL NAME OF SECOND INVENTOR: Howard Lee Thomas

INVENTORS SIGNATURE: _____ DATE: _____

RESIDENCE: 325 Woodmar Court
Ballwin, Missouri 63311

CITIZENSHIP: U.S.A.

POST OFFICE ADDRESS: 325 Woodmar Court
Ballwin, Missouri 63311

FULL NAME OF THIRD INVENTOR: Lei Yao

INVENTORS SIGNATURE: _____ DATE: _____

RESIDENCE: 2000 S. Eads Street, #517
Arlington, Virginia 22202

CITIZENSHIP: China

POST OFFICE ADDRESS: 2000 S. Eads Street, #517
Arlington, Virginia 22202